

AD 634237



[AD]

TECHNICAL REPORT ECOM-01377-3

BALLISTIC WINDS STUDY


QUARTERLY REPORT NO. 3

By

FREDERICK P. OSTBY, JR.

CLEARINGHOUSE FOR FEDERAL SCIENTIFIC AND TECHNICAL INFORMATION			
Handcopy	Microfiche		
\$3.00	\$1.50	57 pp	as
ARCHIVE COPY			

JUNE 1966

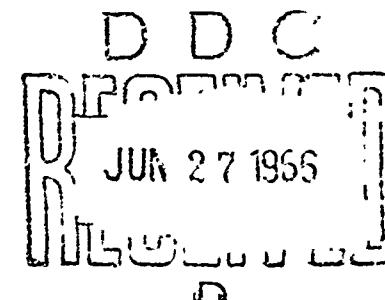

ECOM

UNITED STATES ARMY ELECTRONICS COMMAND - FORT MONMOUTH, N.J.

CONTRACT NO. DA 28-043 AMC-01377(E)

THE TRAVELERS RESEARCH CENTER, INC.

250 CONSTITUTION PLAZA, HARTFORD, CONNECTICUT 06103
ORIGINAL CONTAINS COLOR PLATES: ALL REPRODUCTIONS WILL BE IN BLACK AND WHITE
REPRODUCTIONS WILL BE IN BLACK AND WHITE
ORIGINAL MAY BE SEEN IN D.C. HEADQUARTERS

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government endorsement or approval of commercial products or services referenced herein.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

D
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
8010
8011
8012
8013
8014
8015
8016
8017
8018
8019
8020
8021
8022
8023
8024
8025
8026
8027
8028
8029
8030
8031
8032
8033
8034
8035
8036
8037
8038
8039
8040
8041
8042
8043
8044
8045
8046
8047
8048
8049
8050
8051
8052
8053
8054
8055
8056
8057
8058
8059
8060
8061
8062
8063
8064
8065
8066
8067
8068
8069
8070
8071
8072
8073
8074
8075
8076
8077
8078
8079
8080
8081
8082
8083
8084
8085
8086
8087
8088
8089
8090
8091
8092
8093
8094
8095
8096
8097
8098
8099
80100
80101
80102
80103
80104
80105
80106
80107
80108
80109
80110
80111
80112
80113
80114
80115
80116
80117
80118
80119
80120
80121
80122
80123
80124
80125
80126
80127
80128
80129
80130
80131
80132
80133
80134
80135
80136
80137
80138
80139
80140
80141
80142
80143
80144
80145
80146
80147
80148
80149
80150
80151
80152
80153
80154
80155
80156
80157
80158
80159
80160
80161
80162
80163
80164
80165
80166
80167
80168
80169
80170
80171
80172
80173
80174
80175
80176
80177
80178
80179
80180
80181
80182
80183
80184
80185
80186
80187
80188
80189
80190
80191
80192
80193
80194
80195
80196
80197
80198
80199
80200
80201
80202
80203
80204
80205
80206
80207
80208
80209
80210
80211
80212
80213
80214
80215
80216
80217
80218
80219
80220
80221
80222
80223
80224
80225
80226
80227
80228
80229
80230
80231
80232
80233
80234
80235
80236
80237
80238
80239
80240
80241
80242
80243
80244
80245
80246
80247
80248
80249
80250
80251
80252
80253
80254
80255
80256
80257
80258
80259
80260
80261
80262
80263
80264
80265
80266
80267
80268
80269
80270
80271
80272
80273
80274
80275
80276
80277
80278
80279
80280
80281
80282
80283
80284
80285
80286
80287
80288
80289
80290
80291
80292
80293
80294
80295
80296
80297
80298
80299
80300
80301
80302
80303
80304
80305
80306
80307
80308
80309
80310
80311
80312
80313
80314
80315
80316
80317
80318
80319
80320
80321
80322
80323
80324
80325
80326
80327
80328
80329
80330
80331
80332
80333
80334
80335
80336
80337
80338
80339
80340
80341
80342
80343
80344
80345
80346
80347
80348
80349
80350
80351
80352
80353
80354
80355
80356
80357
80358
80359
80360
80361
80362
80363
80364
80365
80366
80367
80368
80369
80370
80371
80372
80373
80374
80375
80376
80377
80378
80379
80380
80381
80382
80383
80384
80385
80386
80387
80388
80389
80390
80391
80392
80393
80394
80395
80396
80397
80398
80399
80400
80401
80402
80403
80404
80405
80406
80407
80408
80409
80410
80411
80412
80413
80414
80415
80416
80417
80418
80419
80420
80421
80422
80423
80424
80425
80426
80427
80428
80429
80430
80431
80432
80433
80434
80435
80436
80437
80438
80439
80440
80441
80442
80443
80444
80445
80446
80447
80448
80449
80450
80451
80452
80453
80454
80455
80456
80457
80458
80459
80460
80461
80462
80463
80464
80465
80466
80467
80468
80469
80470
80471
80472
80473
80474
80475
80476
80477
80478
80479
80480
80481
80482
80483
80484
80485
80486
80487
80488
80489
80490
80491
80492
80493
80494
80495
80496
80497
80498
80499
80500
80501
80502
80503
80504
80505
80506
80507
80508
80509
80510
80511
80512
80513
80514
80515
80516
80517
80518
80519
80520
80521
80522
80523
80524
80525
80526
80527
80528
80529
80530
80531
80532
80533
80534
80535
80536
80537
80538
80539
80540
80541
80542
80543
80544
80545
80546
80547
80548
80549
80550
80551
80552
80553
80554
80555
80556
80557
80558
80559
80560
80561
80562
80563
80564
80565
80566
80567
80568
80569
80570
80571
80572
80573
80574
80575
80576
80577
80578
80579
80580
80581
80582
80583
80584
80585
80586
80587
80588
80589
80590
80591
80592
80593
80594
80595
80596
80597
80598
80599
80600
80601
80602
80603
80604
80605
80606
80607
80608
80609
80610
80611
80612
80613
80614
80615
80616
80617
80618
80619
80620
80621
80622
80623
80624
80625
80626
80627
80628
80629
80630
80631
80632
80633
80634
80635
80636
80637
80638
80639
80640
80641
80642
80643
80644
80645
80646
80647
80648
80649
80650
80651
80652
80653
80654
80655
80656
80657
80658
80659
80660
80661
80662
80663
80664
80665
80666
80667
80668
80669
80670
80671
80672
80673
80674
80675
80676
80677
80678
80679
80680
80681
80682
80683
80684
80685
80686
80687
80688
80689
80690
80691
80692
80693
80694
80695
80696
80697
80698
80699
80700
80701
80702
80703
80704
80705
80706
80707
80708
80709
80710
80711
80712
80713
80714
80715
80716
80717
80718
80719
80720
80721
80722
80723
80724
80725
80726
80727
80728
80729
80730
80731
80732
80733
80734
80735
80736
80737
80738
80739
80740
80741
80742
80743
80744
80745
80746
80747
80748
80749
80750
80751
80752
80753
80754
80755
80756
80757
80758
80759
80760
80761
80762
80763
80764
80765
80766
80767
80768
80769
80770
80771
80772
80773
80774
80775
80776
80777
80778
80779
80780
80781
80782
80783
80784
80785
80786
80787
80788
80789
80790
80791
80792
80793
80794
80795
80796
80797
80798
80799
80800
80801
80802
80803
80804
80805
80806
80807
80808
80809
80810
80811
80812
80813
80814
80815
80816
80817
80818
80819
80820
80821
80822
80823
80824
80825
80826
80827
80828
80829
80830
80831
80832
80833
80834
80835
80836
80837
80838
80839
80840
80841
80842
80843
80844
80845
80846
80847
80848
80849
80850
80851
80852
80853
80854
80855
80856
80857
80858
80859
80860
80861
80862
80863
80864
80865
80866
80867
80868
80869
80870
80871
80872
80873
80874
80875
8087

TECHNICAL REPORT ECOM-01377-3

June 1966

BALLISTIC WINDS STUDY

Quarterly Report

Report No. 3

Contract No. DA 28-043-AMC-01377(E)

Prepared by

Frederick P. Ostby, Jr.

THE TRAVELERS RESEARCH CENTER, INC.

259 Constitution Plaza Hartford, Connecticut 06103

For

**U.S. ARMY ELECTRONICS COMMAND, FORT MONMOUTH, N. J.
DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED**

ABSTRACT

An objective analysis technique known as CRAM (Conditional Relaxation Analysis Method) has been programmed for the IBM 7090 to compute ballistic winds, temperature, and density over a region of southeastern Arizona in the vicinity of Ft. Huachuca. The various components and available options of the program are described. A set of analyses produced from initial tests is shown and the ballistic quantities derived are compared with those of the previous quarterly report.

Corrections based on a single station (Ft. Huachuca) were applied to concurrent artillery firings for 19 cases. The residual errors derived from these cases will be used as a control for later experiments. The distribution of the residual errors relative to the target strongly suggests a bias in range errors, the average impact location being nearly 200 meters beyond the target.

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
1.0	INTRODUCTION	1
2.0	OBJECTIVE ANALYSIS EXPERIMENTS	2
2.1	Description of CRAM Program	2
2.1.1	The Initial Guess	2
2.1.2	Correction Procedures	3
2.1.3	Relaxation Methods	3
2.1.4	Smoothing	5
2.1.5	Ballistic Computation	5
2.2	Analysis Examples	5
3.0	CORRECTIONS BASED ON A SINGLE STATION	27
4.0	POST-PROCESSING PROGRAM	49
DISTRIBUTION LIST		51
DD Form 1473		

LIST OF ILLUSTRATIONS

<u>Figure</u>	<u>Title</u>	<u>Page</u>
2-1	Objective analysis grid showing observing stations. Grid units are based on the 10,000-m Universal Transverse Mercator Grid (Zone 12), with the last four digits of the grid numbers omitted	7
2-2	Ballistic wind analysis using CRAM: 0600 MST, 25 January 1965	8
2-3	Ballistic wind analysis using CRAM: 0800 MST, 25 January 1965	9
2-4	Ballistic wind analysis using CRAM: 1000 MST, 25 January 1965	10
2-5	Ballistic wind analysis using CRAM: 1200 MST, 25 January 1965	11
2-6	Ballistic wind analysis using CRAM: 1400 MST, 25 January 1965	12
2-7	Ballistic temperature and density analysis using CRAM: 0600 MST, 25 January 1965 (percent departure from Standard)	13
2-8	Ballistic temperature and density analysis using CRAM: 0800 MST, 25 January 1965 (percent departure from Standard)	14
2-9	Ballistic temperature and density analysis using CRAM: 1000 MST, 25 January 1965 (percent departure from Standard)	15
2-10	Ballistic temperature and density analysis using CRAM: 1200 MST, 25 January 1965 (percent departure from Standard)	16
2-11	Ballistic temperature and density analysis using CRAM: 1400 MST, 25 January 1965 (percent departure from Standard)	17
2-12	Residual errors for 1000 MST (AM) and 1400 MST (PM) firings (Gun No. 1) on 25 January 1965 using corrections based on various analysis procedures (from Table 2-3)	26
3-1	Residual errors for Gun No. 1 firings listed in Table 3-1. Numbers refer to case numbers in table	47
3-2	Residual errors for Gun No. 2 firings listed in Table 3-1. Numbers refer to case numbers in table	48

1.0 INTRODUCTION

Work in the third quarter centered around the checkout and initial test runs of the CRAM (Conditional Relaxation Analysis Method) objective analysis program. These tests were concerned with variations of forcing functions, initial guesses, relaxation and smoothing procedures, and scaling of the vertical coordinate as applied to the four analysis parameters: u- and v-wind components, temperature, and density.

The associated gun data resulting from the test firings of a pair of 8-inch howitzers are being studied. A small computer program has been written that applies drift and coriolis corrections to a given impact point, and meteorological corrections of ballistic-wind components, temperature, and density. The program was run on a portion of the January–February 1965 data sample. Results are described in Section 3.0.

The third activity of the quarter involved the preparation of a post-processing program that will operate on the output of the objective analysis program. The purpose of this new program is to compute ballistic corrections, error fields, and certain statistical summaries of the data.

2.0 OBJECTIVE ANALYSIS EXPERIMENTS

2.1 Description of CRAM Program

CRAM is the principal analysis tool for this study to provide analyzed maps of winds, temperature, and density. The main components of the CRAM program are: (a) the initial-guess technique, (b) correction procedures, (c) relaxation methods, (d) smoothing, and (e) ballistic computation. The description of these components that follows points out the features of this IBM 7090 program.

2.1.1 The Initial Guess

CRAM requires the use of an initial-guess field, which undergoes subsequent corrections. In principle, the initial-guess field can be generated in a variety of ways. Two rather reasonable approaches are to apply a surface-fitting technique to the data or to use the previous analysis (e.g., two hours earlier), if one is available, or some combination or "blend" of the two approaches. Our version of the program uses these surface fitting and persistence approaches.

In the surface fitting procedure, the three-dimensional surface is sought which best fits the observed field of data. The equation is of the form

$$\phi = a_0 + a_1 x_1 + a_2 x_2 + a_3 x_3 + \dots + a_p x_p \quad (2-1)$$

where the dependent variable ϕ is the variable to be analyzed over an evenly-spaced field of grid points, the a 's are the coefficients and the x 's are the independent variables which are functions of the locations of the observations of ϕ , i.e., x , y , and z . Because there are a large number of terms that can be generated from the possible combinations of x , y , and z , many of which may not be significant in explaining the variability of ϕ , it seems reasonable to attempt to reduce the number of possible "predictors" through the use of a systematic, stepwise screening procedure. The method chosen is that of screening regression. From an array of possible predictors (x , y , z , xy , xz , etc.), the screening procedure first selects the one that has the highest linear correlation with the predictand in question. This predictand is then held constant, and partial-correlation coefficients between the predictand and each of the remaining predictors are examined; the predictor now associated with the highest coefficient is the second one selected. Additional predictors are chosen similarly until a selected predictor fails to explain a significant additional percentage of the remaining

variance of the predictand. The coefficients (a_0 , a_1 , etc.) are then derived by the method of least squares. The initial-guess field is then generated by solving the derived equation at each of the grid points in the analysis volume.

The program is written such that it is possible to compute an initial guess from a blend of persistence and surface fitting. This is done to incorporate continuity, as the observations are taken at two-hour intervals on alternate days between 0600 and 1400 MST. For the first observation time of the day (0600 MST), however, no weight is given to persistence because the previous available observation is usually forty hours old. The formula used in the program to calculate the initial-guess value of ϕ at a grid point is

$$\phi_{\text{I.G.}} = \frac{\frac{1}{1+W_p}}{\frac{W_p}{1+W_p}} \phi_{\text{surface fit}} + \frac{\frac{W_p}{1+W_p}}{\frac{W_p}{1+W_p}} \phi_{\text{persistence}} \quad (2-2)$$

where W_p = weight of persistence. By assigning a value of zero to W_p , persistence is given no weight and the initial guess is based solely on the surface fit. A value of one for W_p assigns half the weight to each while a very large value of W_p essentially gives all the weight to persistence.

2.1.2 Correction Procedures

After it is determined, the initial-guess field is "corrected". For each observation, the difference between the observed value and the value computed for that location by interpolating among the initial-guess values at the surrounding grid points is computed. This difference is then translated to the nearest grid point and added to that grid point as a correction to the initial guess. When a grid point is subject to multiple corrections (from several different observations), an overall correction is computed as the arithmetic average of the several individual corrections.

2.1.3 Relaxation Methods

The relaxation process is the next step in the objective analysis procedure. We compute for all grid points, except those on the boundaries and those which have been corrected by data, new values that satisfy the Poisson equation,

$$\nabla^2 \phi(i, j, k) = F(i, j, k) \quad (2-3)$$

where ϕ is the value of the analysis parameter at grid point (i, j, k) , F is a forcing function which may define some specified feature of the field of ϕ , and ∇^2 is the finite-

difference Laplacian operator in three dimensions. The Laplacian of a good initial-guess field provides a good forcing function. In the program, the formula is written as follows:

$$\begin{aligned}\nabla^2 \phi(i, j, k) &= \phi(i+1, j, k) + \phi(i-1, j, k) + \phi(i, j+1, k) + \phi(i, j-1, k) \\ &\quad - 4\phi(i, j, k) + K_A [\phi(i, j, k+1) - \phi(i, j, k)] \\ &\quad - K_B [\phi(i, j, k) - \phi(i, j, k-1)]\end{aligned}\quad (2-4)$$

where K_A and K_B are coefficients pertaining to the vertical gradient computed above and below the analysis grid point, respectively.

The horizontal and vertical space gradients have been expressed separately in this equation. There are several practical reasons for doing this, all having to do with the scaling of the vertical coordinate used in the analysis technique. The basic horizontal grid length is 10 km, while in the vertical the grid length is about an order of magnitude smaller. Measuring gradients over this smaller distance is generally compensated for by the fact that, for most atmospheric variables, the vertical gradients are much larger than the horizontal gradients so that one may be justified in using $K_A = K_B = 1$ in Eq. (2-4). The relative inequalities between the grid distances above and below the grid point which arise from the uneven spacing of the artillery zones may be accounted for by assigning different values to K_A and K_B . Also, it is possible in the program to consider the objective analysis problem in a two dimensional framework by simply setting $K_A = K_B = 0$.

The solution of Eq. (2-3) is accomplished by relaxation methods. For each of the grid points where new values are being computed, the residual, R , is computed by

$$R(i, j, k) = \nabla^2 \phi(i, j, k) - F(i, j, k). \quad (2-5)$$

New estimates of ϕ are then computed by

$$\hat{\phi}(i, j, k) = \alpha R(i, j, k) + \phi(i, j, k) \quad (2-6)$$

where α , a relaxation coefficient, is an input parameter. New residuals are then computed. The iterative procedure continues until all residuals are less than a specified value (ϵ).

2.1.4 Smoothing

A smoothing operator has been developed which is designed to eliminate from the analysis undesirable small-scale features. The expression used is

$$\begin{aligned} S[\phi(i, j, k)] &= W_1 \phi(i, j, k) + W_2 [\phi(i+1, j, k) + \phi(i-1, j, k) \\ &\quad + \phi(i, j+1, k) + \phi(i, j-1, k)] \\ &\quad + W_3 [\phi(i, j, k+1) + \phi(i, j, k-1)], \end{aligned} \quad (2-7)$$
$$\left(W_1 = \frac{6}{6 + 4B_h + 2B_v}; \quad W_2 = \frac{B_h}{6 + 4B_h + 2B_v}; \quad W_3 = \frac{B_v}{6 + 4B_h + 2B_v} \right)$$

The parameters B_h and B_v control the degree of smoothing to be performed.

A value of zero assigned to each results in the entire weight being given to $\phi(i, j, k)$, i.e., no smoothing. Large values of B_h and B_v result in heavy smoothing. Also, if smoothing can be restricted to two dimensions by setting $B_v = 0$.

2.1.5 Ballistic Computation

The CRAM Program produces analyses of u- and v-wind components, temperature, and density for each of ten artillery zones. These zones are listed in Table 2-1 for an analysis area 17 grid units in the I-direction (from I=50 to I=66) and 15 grid units in the J-direction (from J=345 to J=359) or about 170 km x 150 km.

A portion of this grid is shown in Fig. 2-1. The analysis area is purposely made large so that analysis problems associated with the boundaries are far enough removed to not contaminate the analysis in the region of interest, i.e., near the firing area. The ballistic fields are produced within the program by applying the zone weighting factors that are given in Table 2-1. A minor modification in the program will permit ballistic computations of "lines" other than merely line 10.

2.2 Analysis Examples

The five time periods of 25 January 1965 were chosen to illustrate the CRAM Program. This is the same data sample that was analyzed by hand and reported in the previous quarterly report*. Results of these analyses should be considered as being

*Ostby, F. P., 1966: Ballistic Winds Study, Quarterly Report No. 2, Contract No. DA 28-043 AMC-01377(E), The Travelers Research Center, Inc.

TABLE 2-1
ZONE STRUCTURE AND WEIGHTING FACTORS FOR BALLISTIC
COMPUTATIONS (maximum ordinate: 8,000 m)

Zone	Height (m)		Weighting factors*		
	Base	Top	Wind	Temperature	Density
1	Surface	200	0.01	0.00	0.03
2	200	500	0.02	0.01	0.04
3	500	1000	0.02	0.02	0.07
4	1000	1500	0.04	0.02	0.07
5	1500	2000	0.03	0.03	0.07
6	2000	3000	0.07	0.07	0.13
7	3000	4000	0.08	0.13	0.12
8	4000	5000	0.09	0.22	0.11
9	5000	6000	0.09	0.23	0.11
10	6000	8000	0.55	0.27	0.25

*From FM 6-16, Tables for Artillery Meteorology.

of a preliminary nature, with further testing of the program options being required. The analyses are shown in Figs. 2-2 through 2-11.

The initial-guess procedure of blending a surface fit with persistence, described in Section 2.1.1, was not ready in time for this particular set of analyses. An alternate procedure with a four-dimensional surface fit incorporating time (*t*) was used. The screening regression technique was applied to parameters generated from various combinations of *x*, *y*, *z*, and *t*. The resulting set of equations showed considerable dependency on the vertical coordinate, with *z* terms being selected first for each of the four equations.

In these initial tests we have used a forcing function of zero [*F* = 0 in Eq. (2-3)] and have also set $K_A = K_B = 0$ in Eq. (2-4). Testing of the relaxation coefficient, α , indicates that the number of iterations are minimized with $\alpha = 0.22$. The smoothing operator was employed using $B_h = 1.5$ and $B_v = 0$, which give half the weight to the grid point in question and the other half to the average of the four surrounding grid

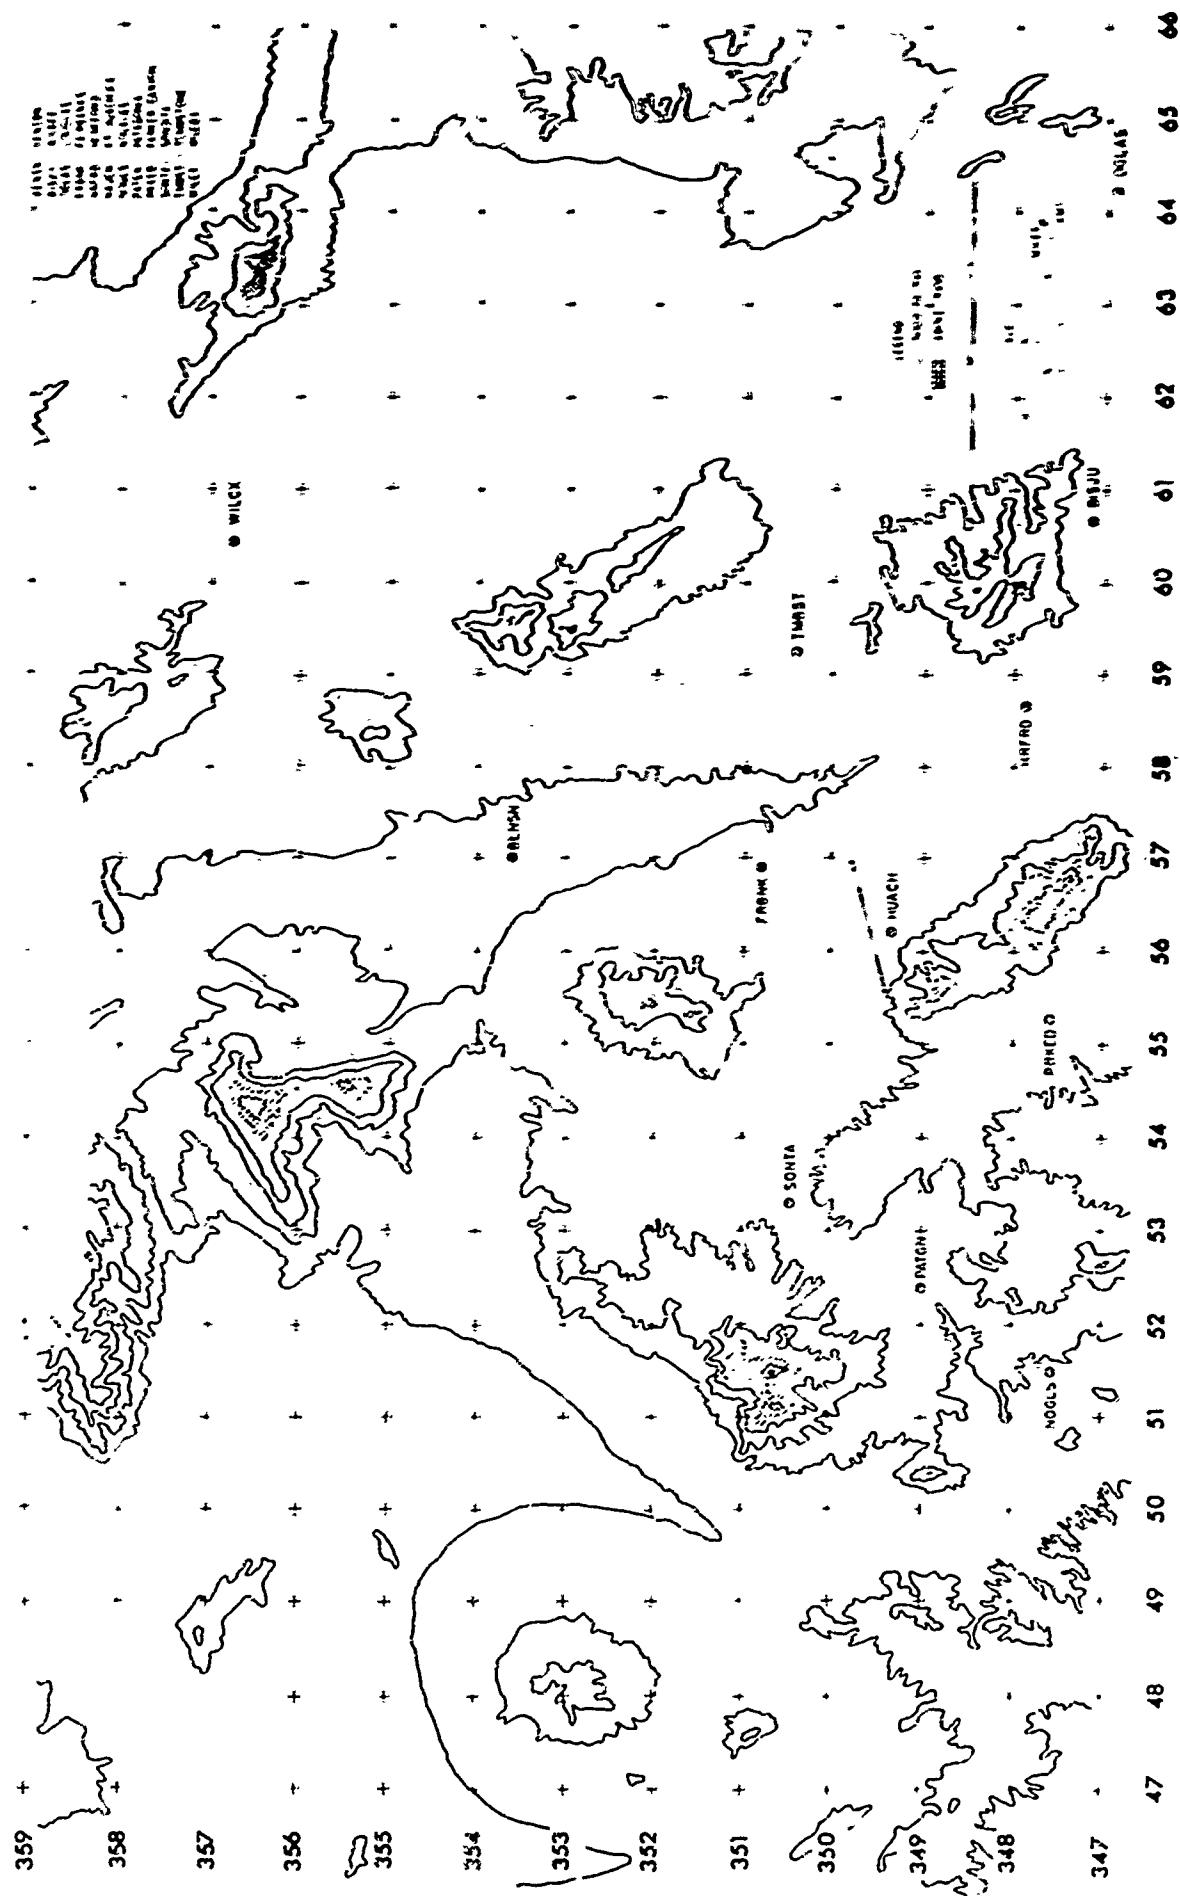


Fig. 2-1. Objective analysis grid showing observing stations. Grid units are based on the 10,000-m Universal Transverse Mercator Grid (Zone 12), with the last four digits of the grid numbers omitted.

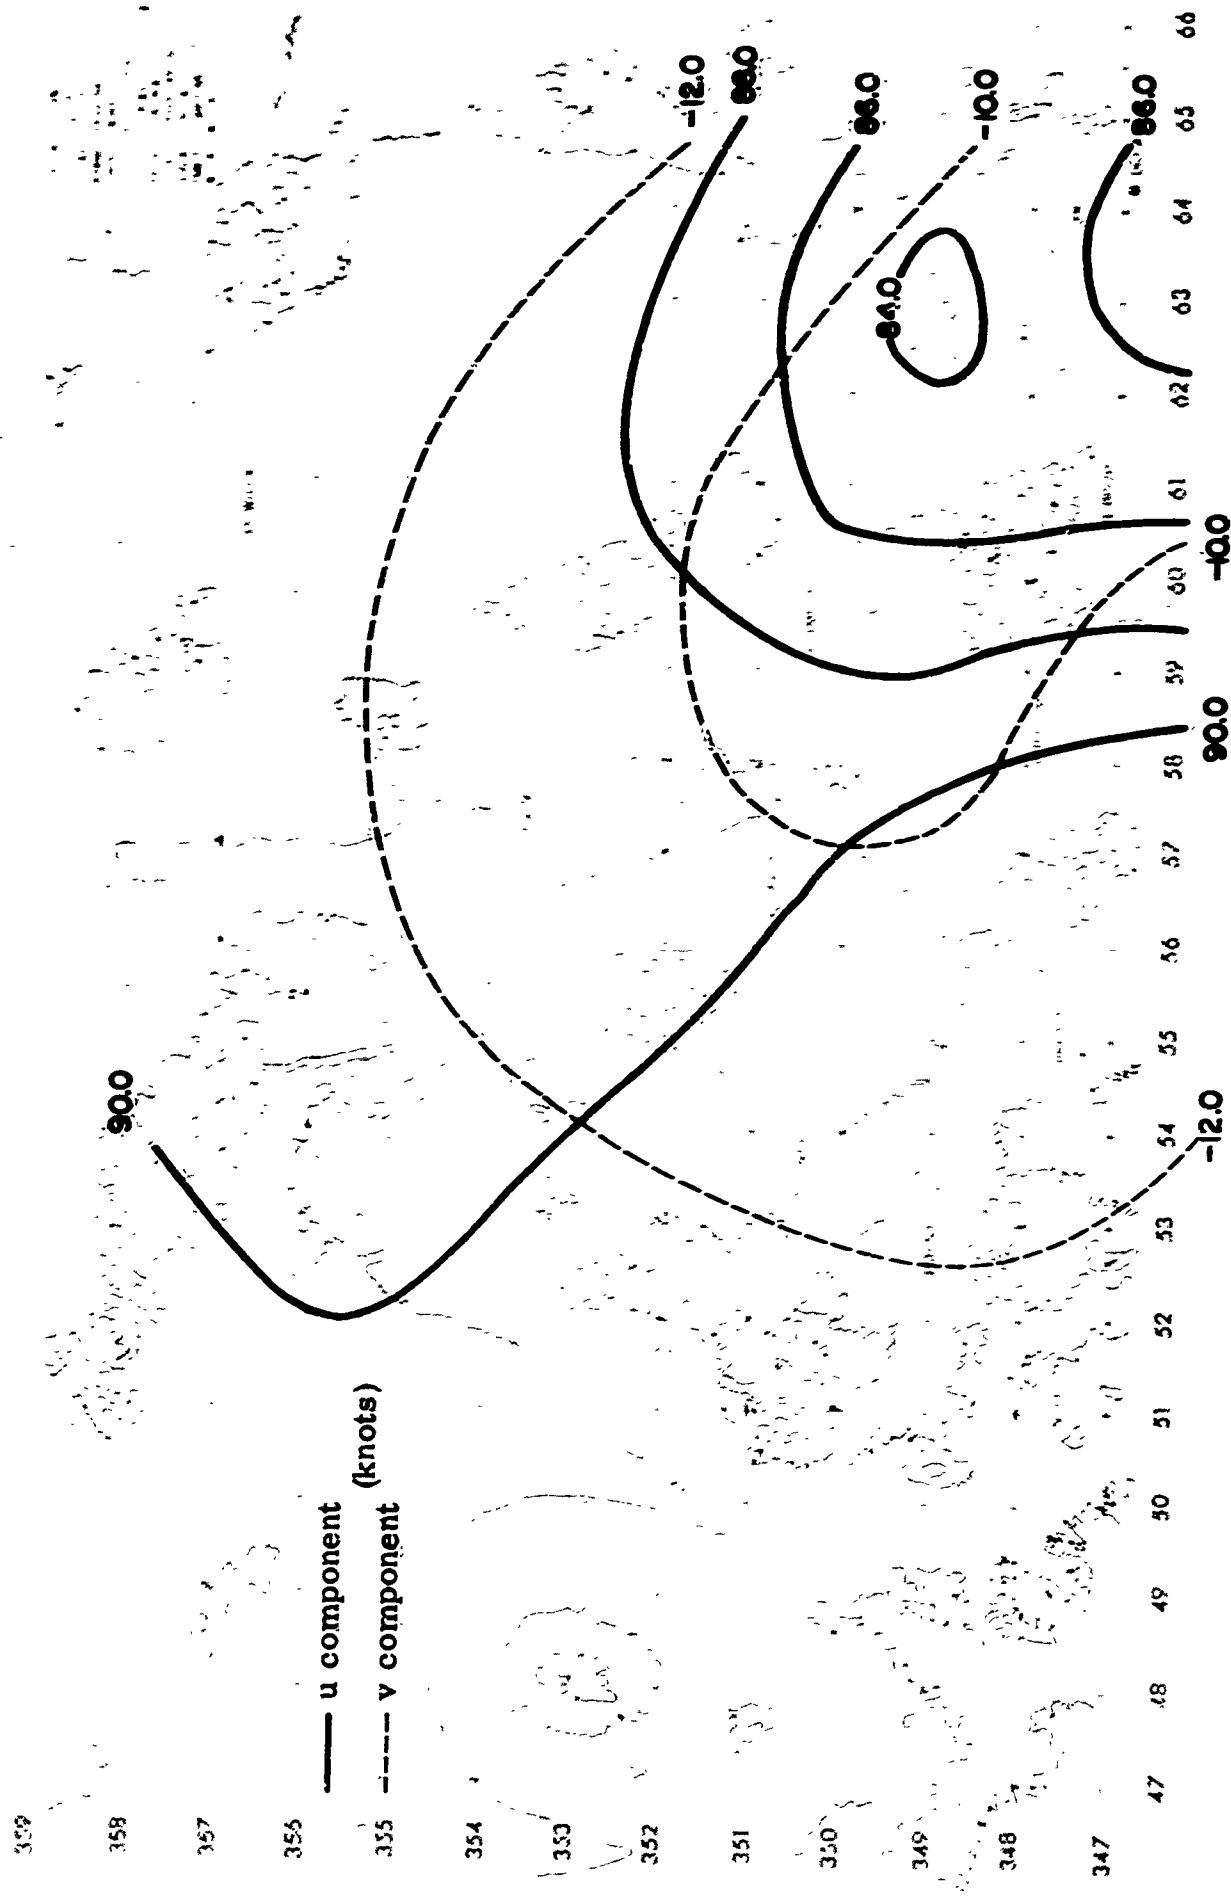


Fig. 2-2. Ballistic wind analysis using CRAM: 0600 MST, 25 January 1965.

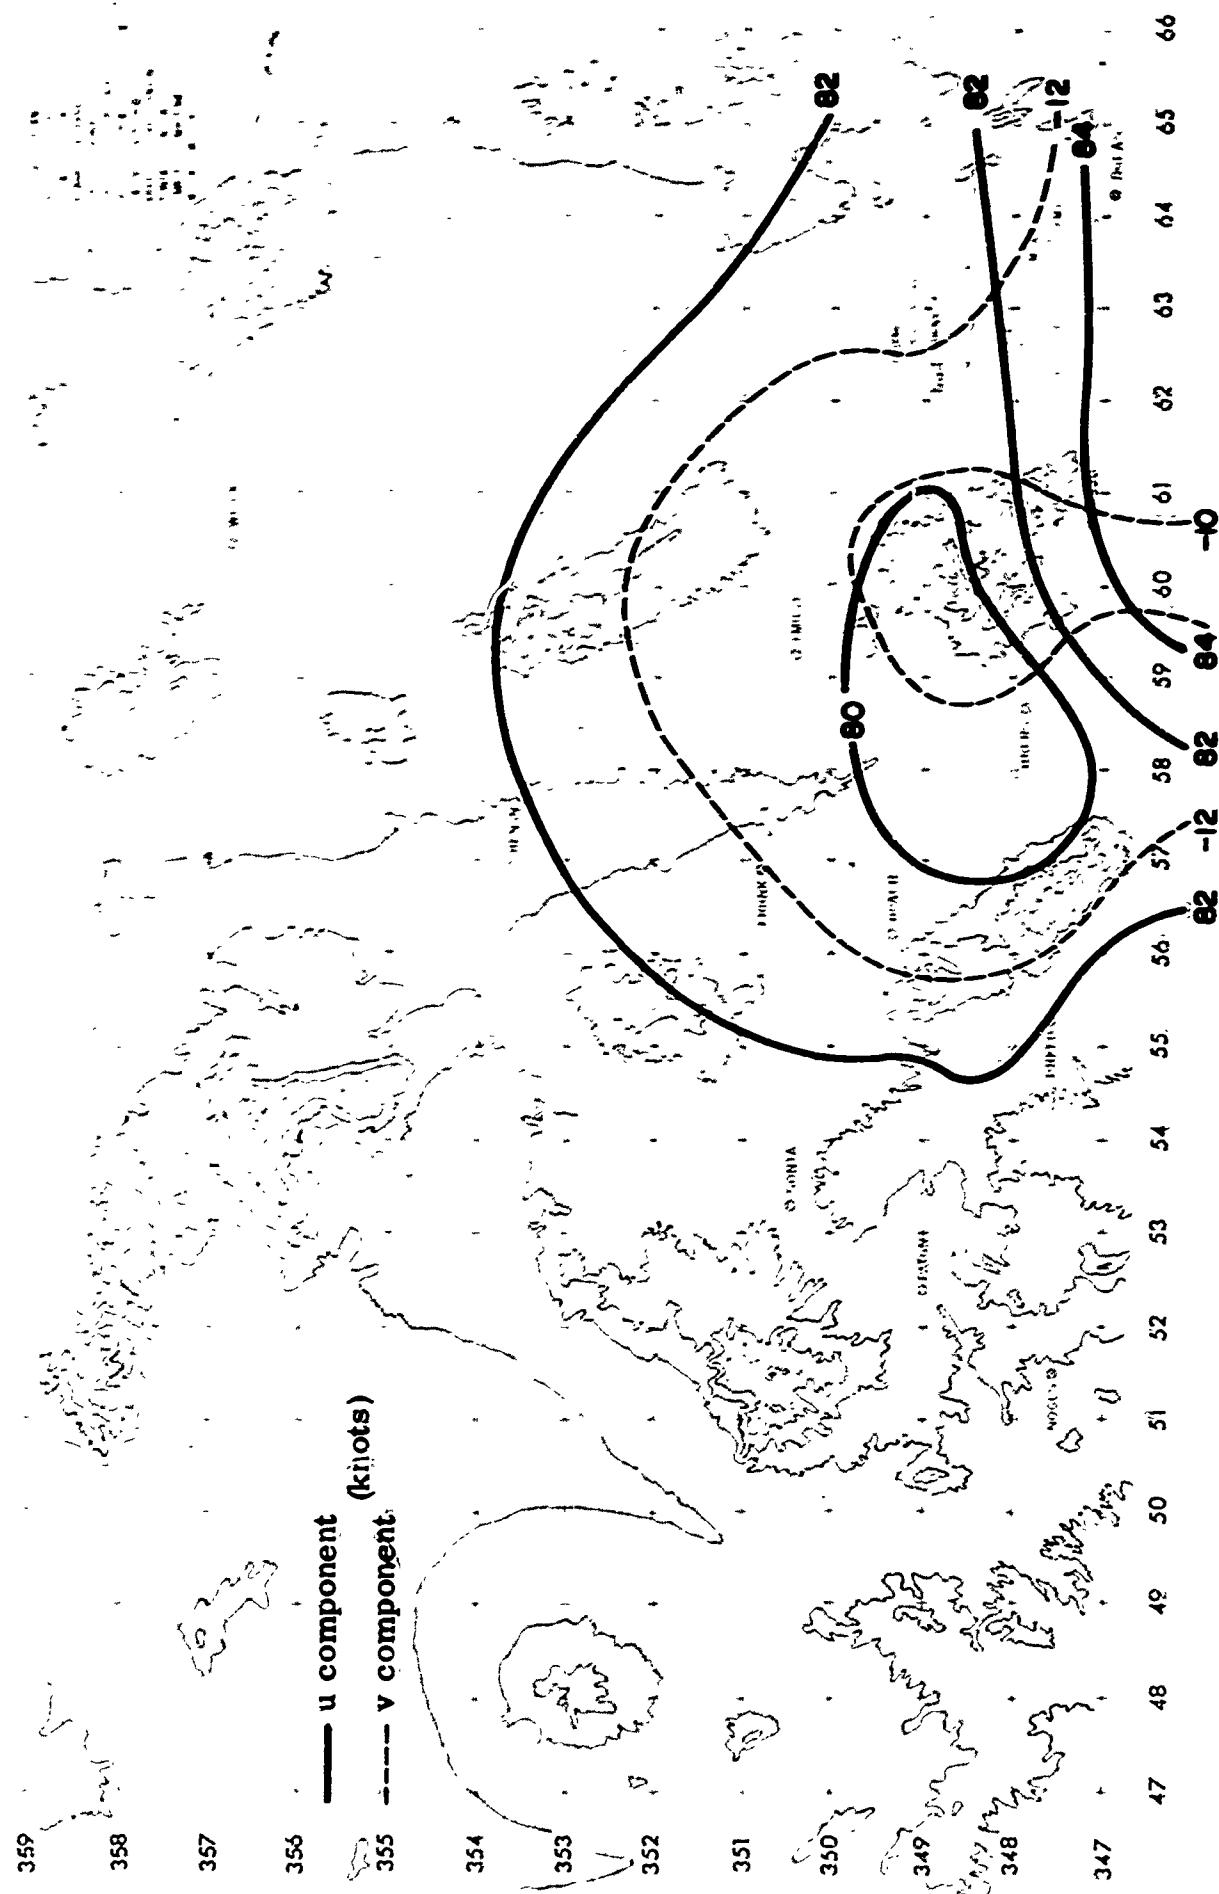


Fig. 2-3. Ballistic wind analysis using C.R.M.: 0800 MST, 25 January 1965.

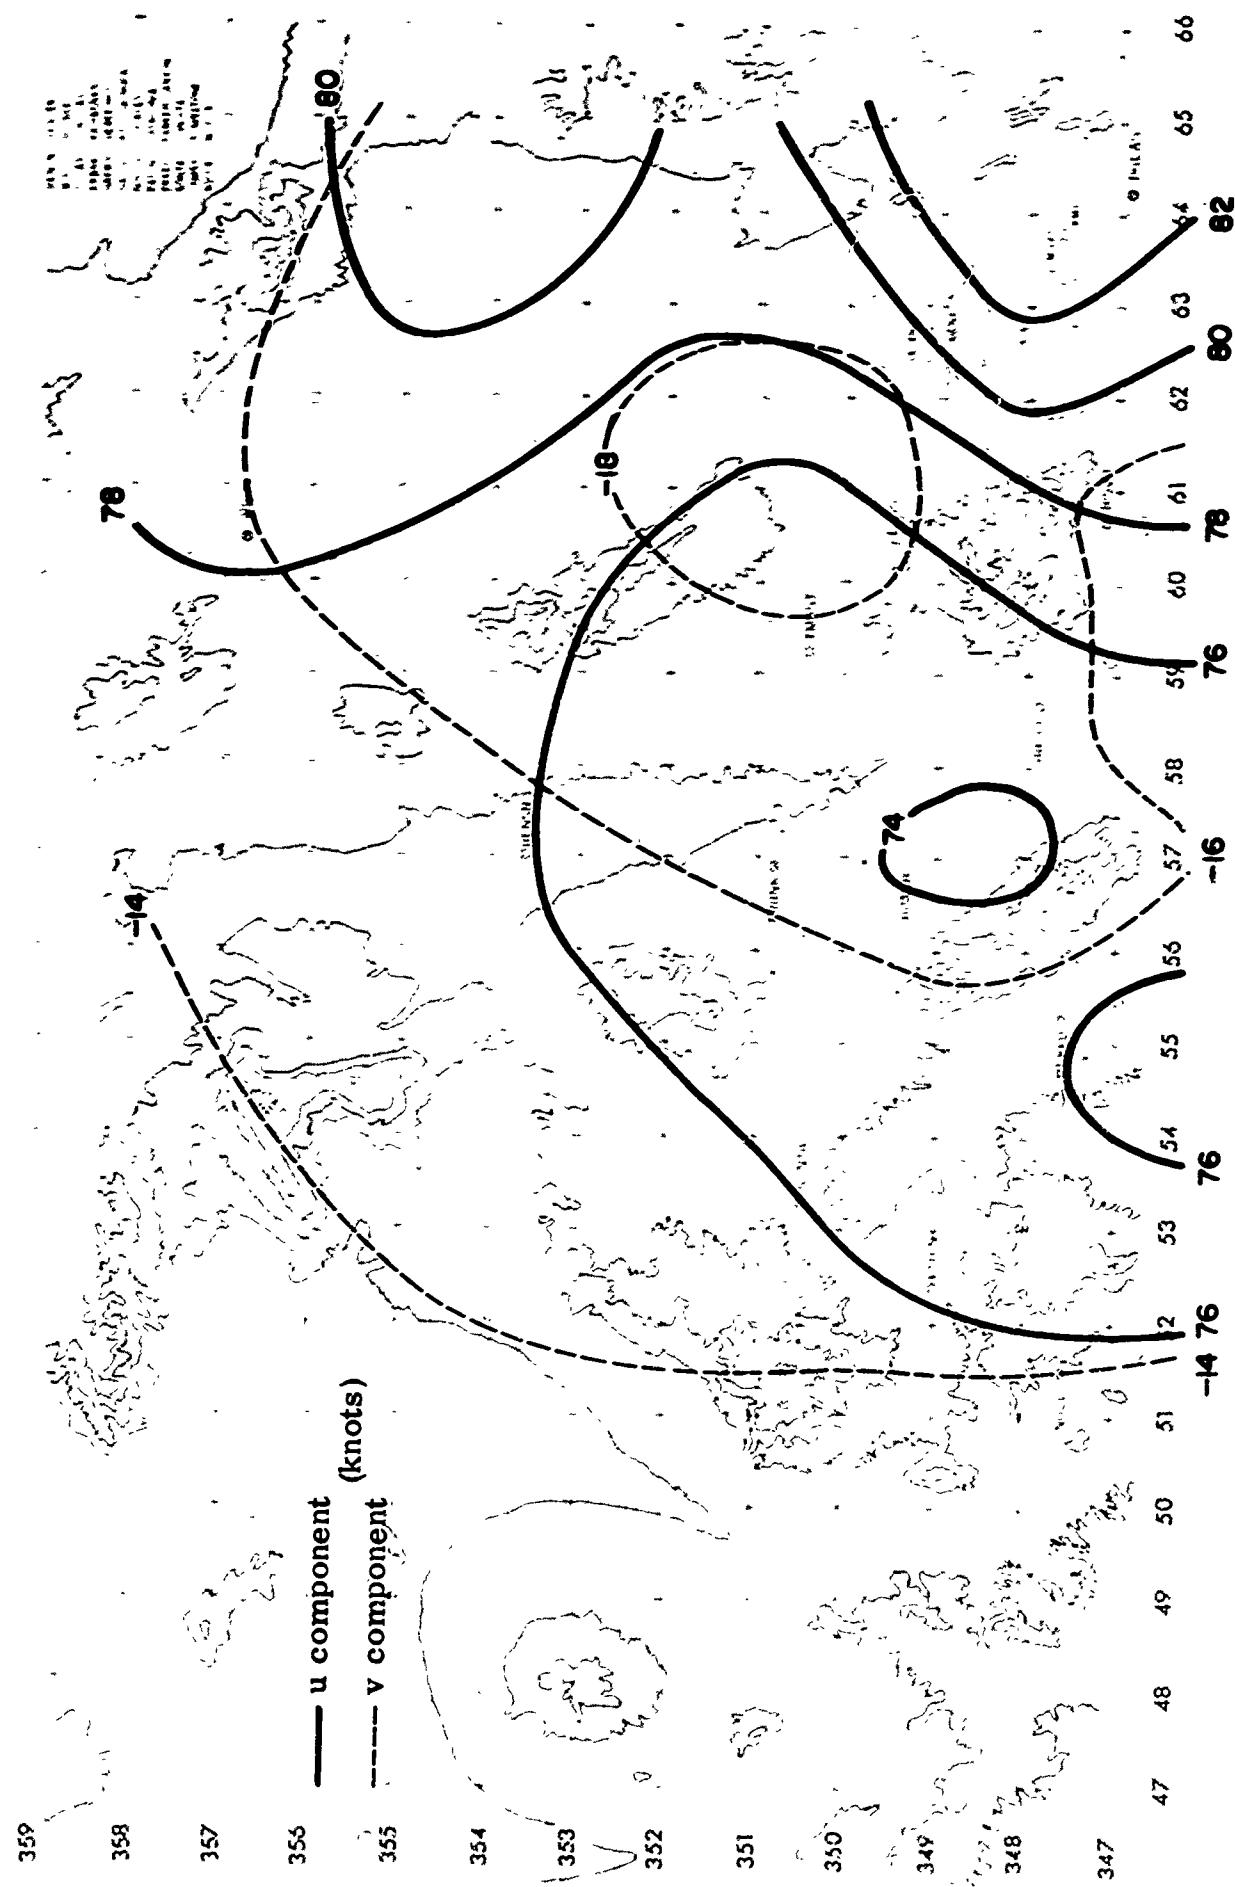


Fig. 2-4. Ballistic wind analysis using CRAM: 1000 MST, 25 January 1965.

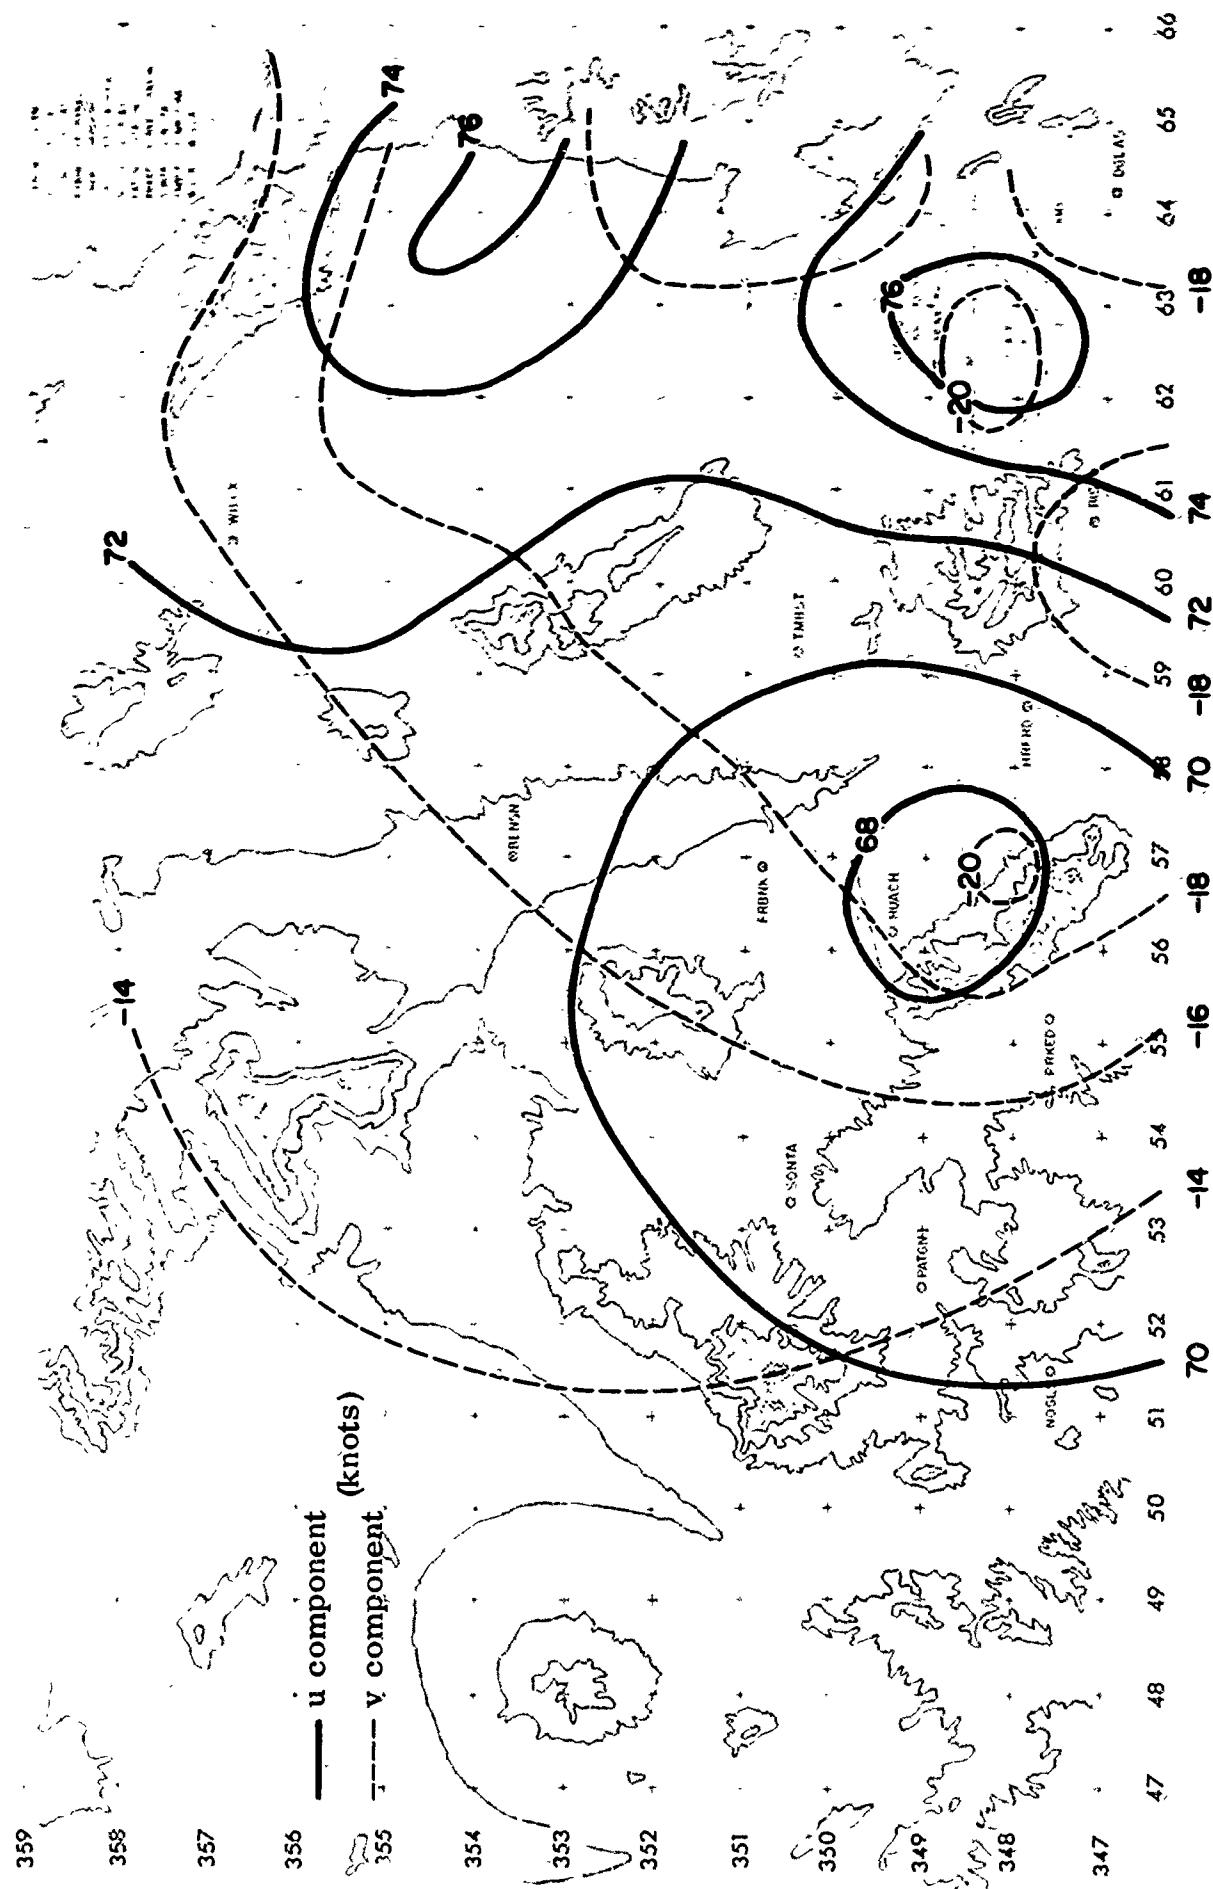


Fig. 2-5. Ballistic wind analysis using CRAM: 1200 MST, 25 January 1965.

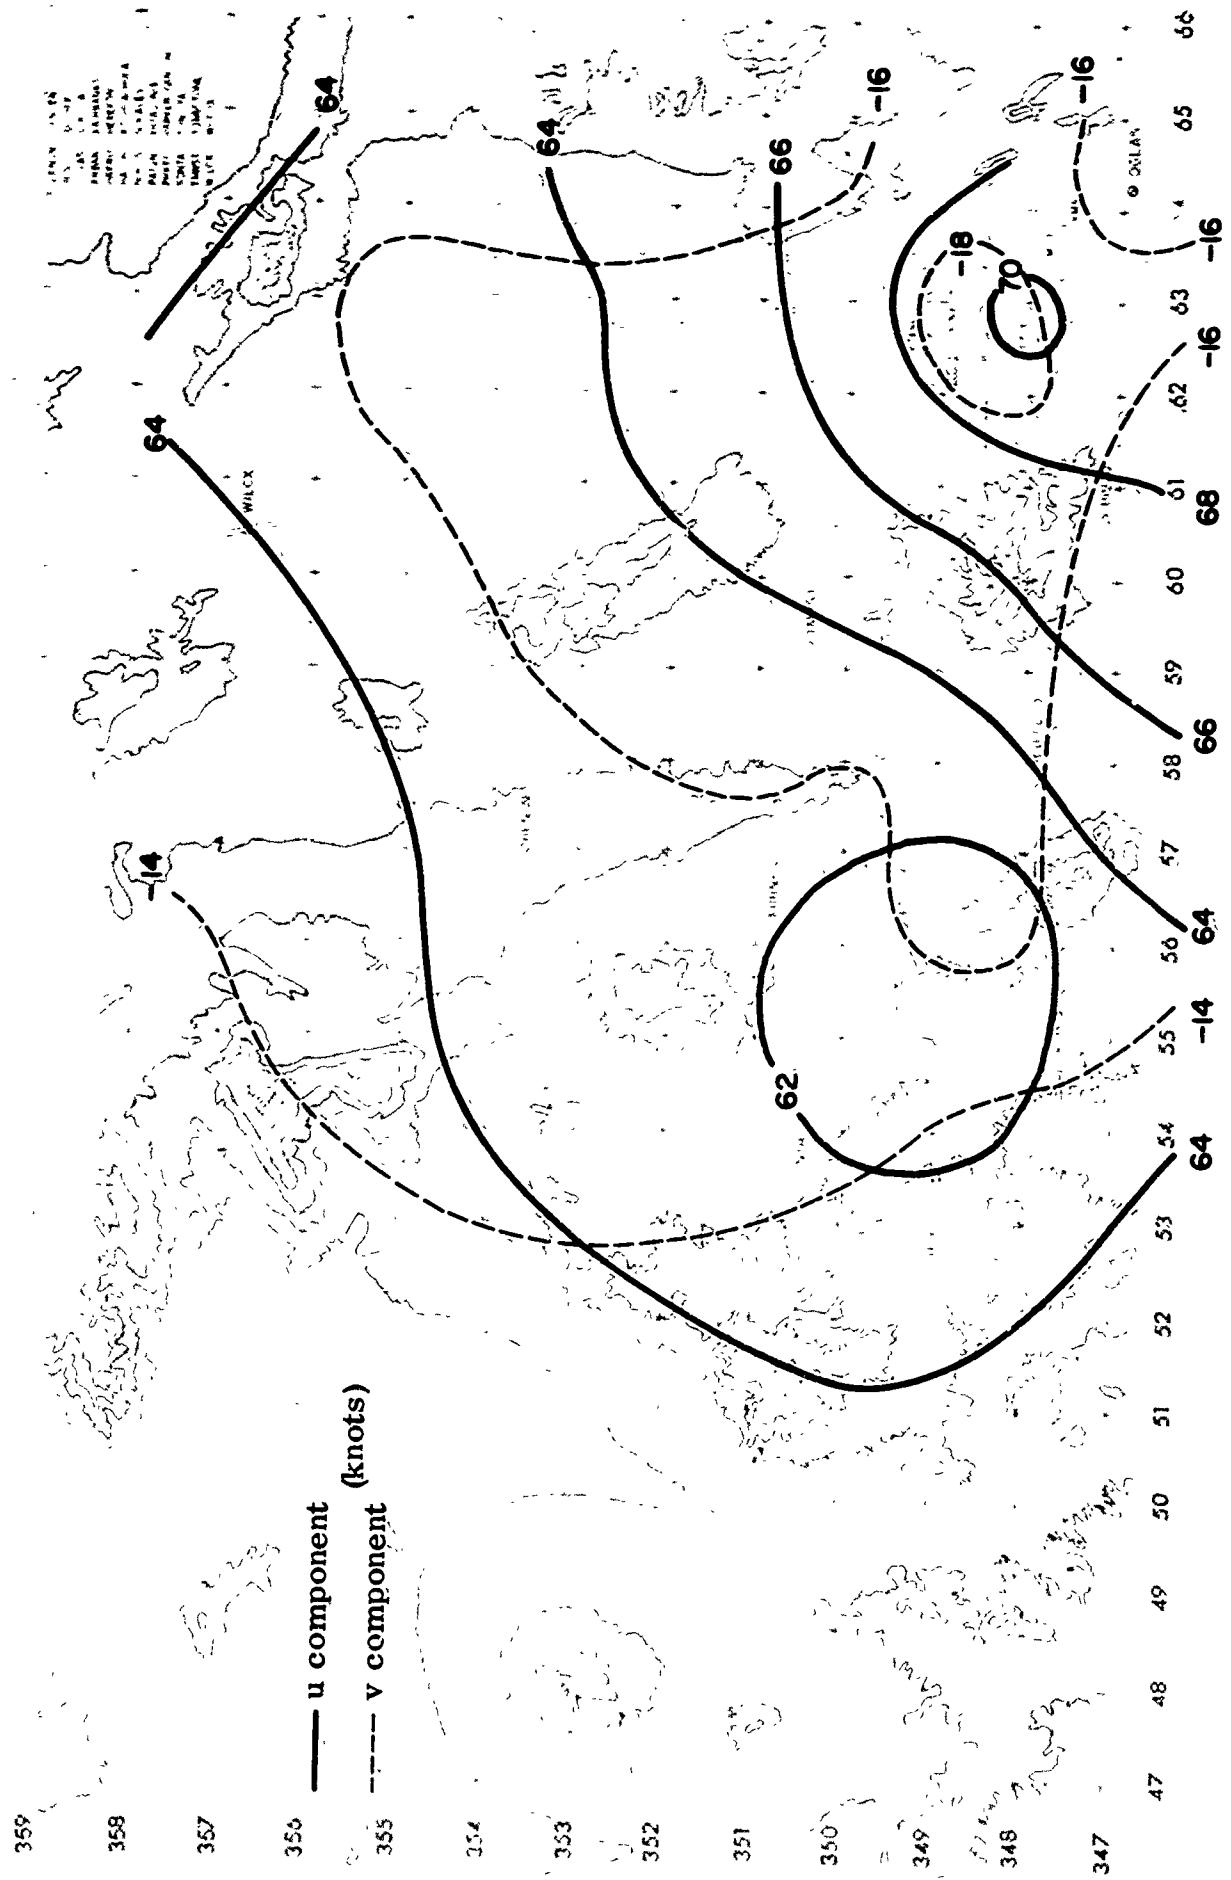


Fig. 2-6. Ballistic wind analysis using CRAAM: 1400 MST, 25 January 1965.

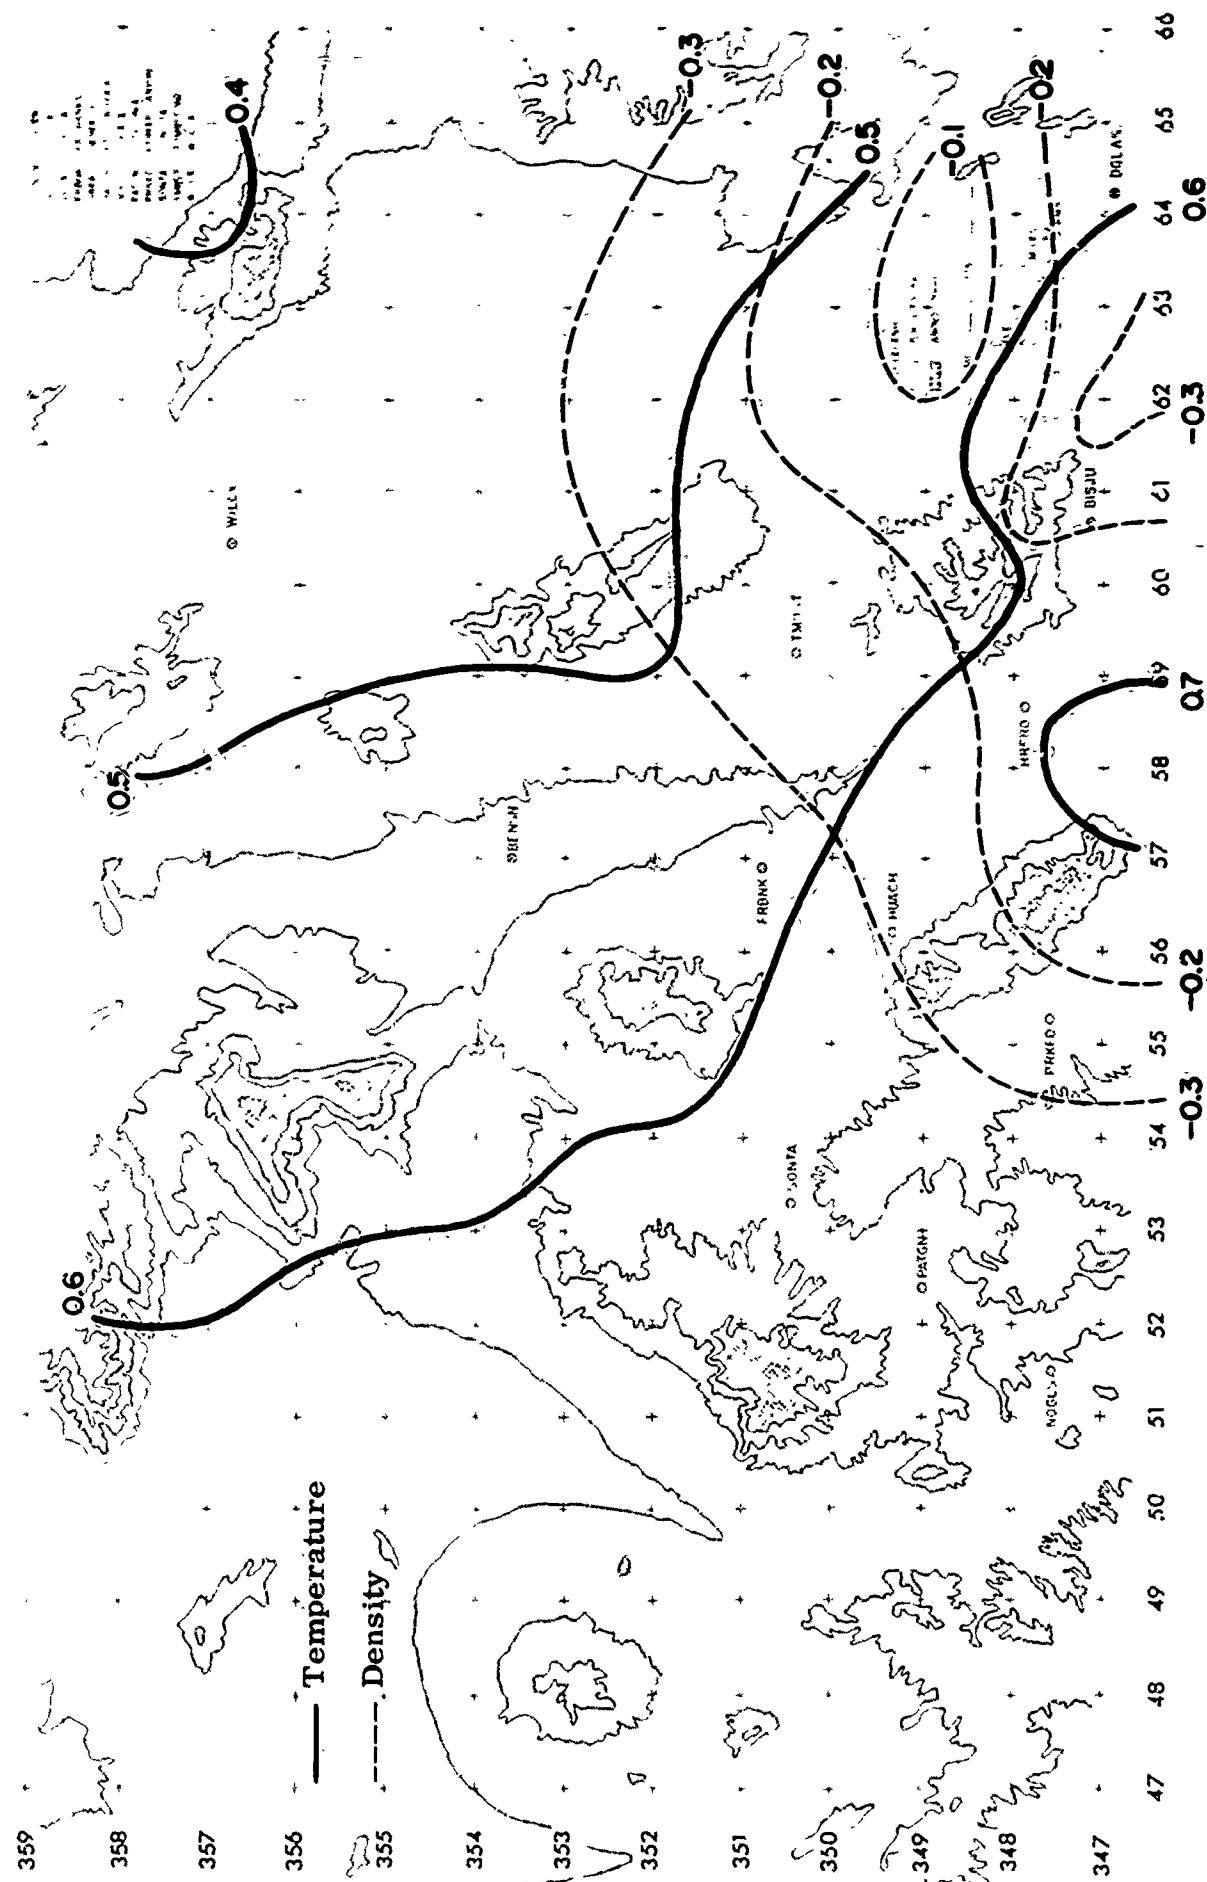


Fig. 2-7. Ballistic temperature and density analysis using CRAM: 0600 MST, 25 January 1965 (percent departure from Standard).

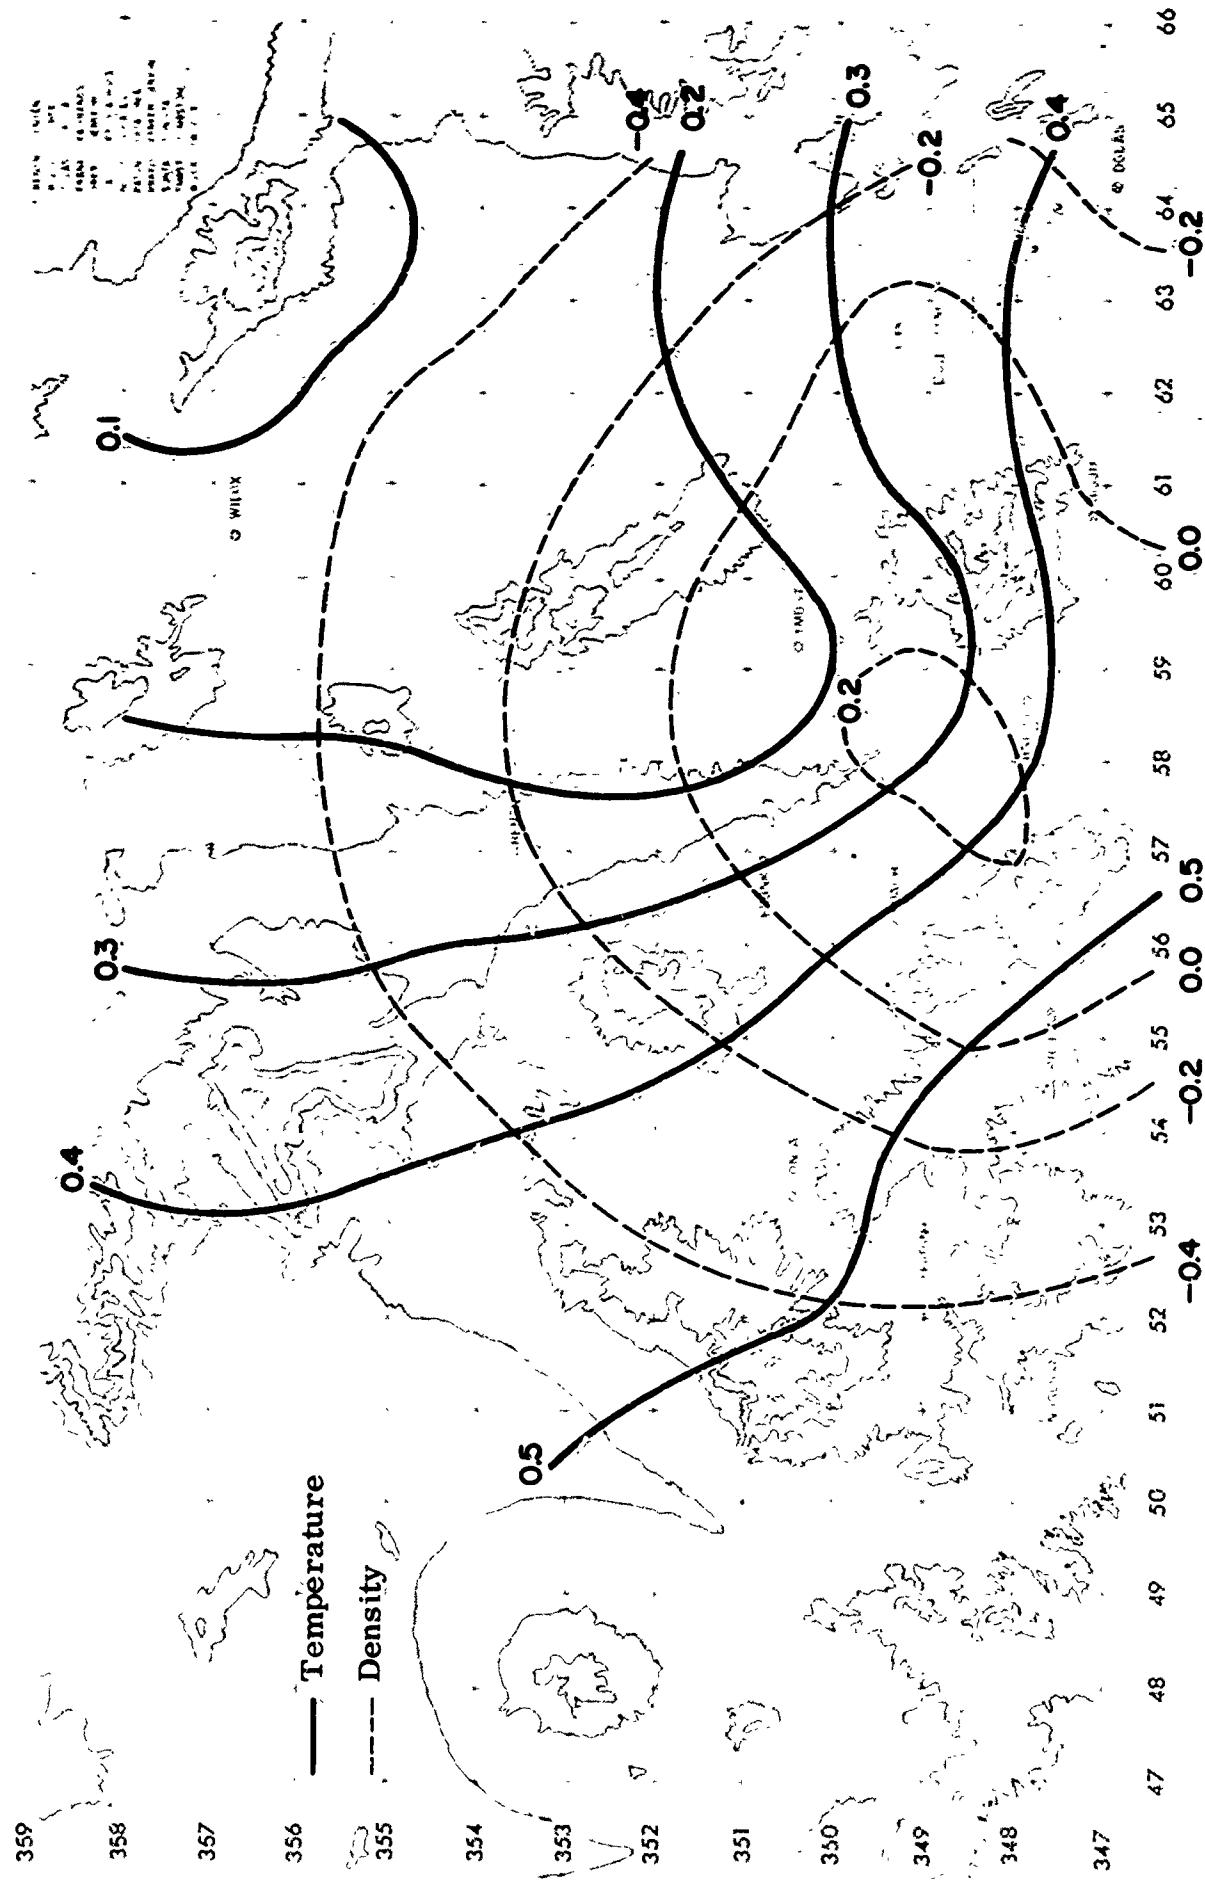


Fig. 2-8. Ballistic temperature and density analysis using CRAM: 0800 MST, 25 January 1965 (percent departure from Standard).

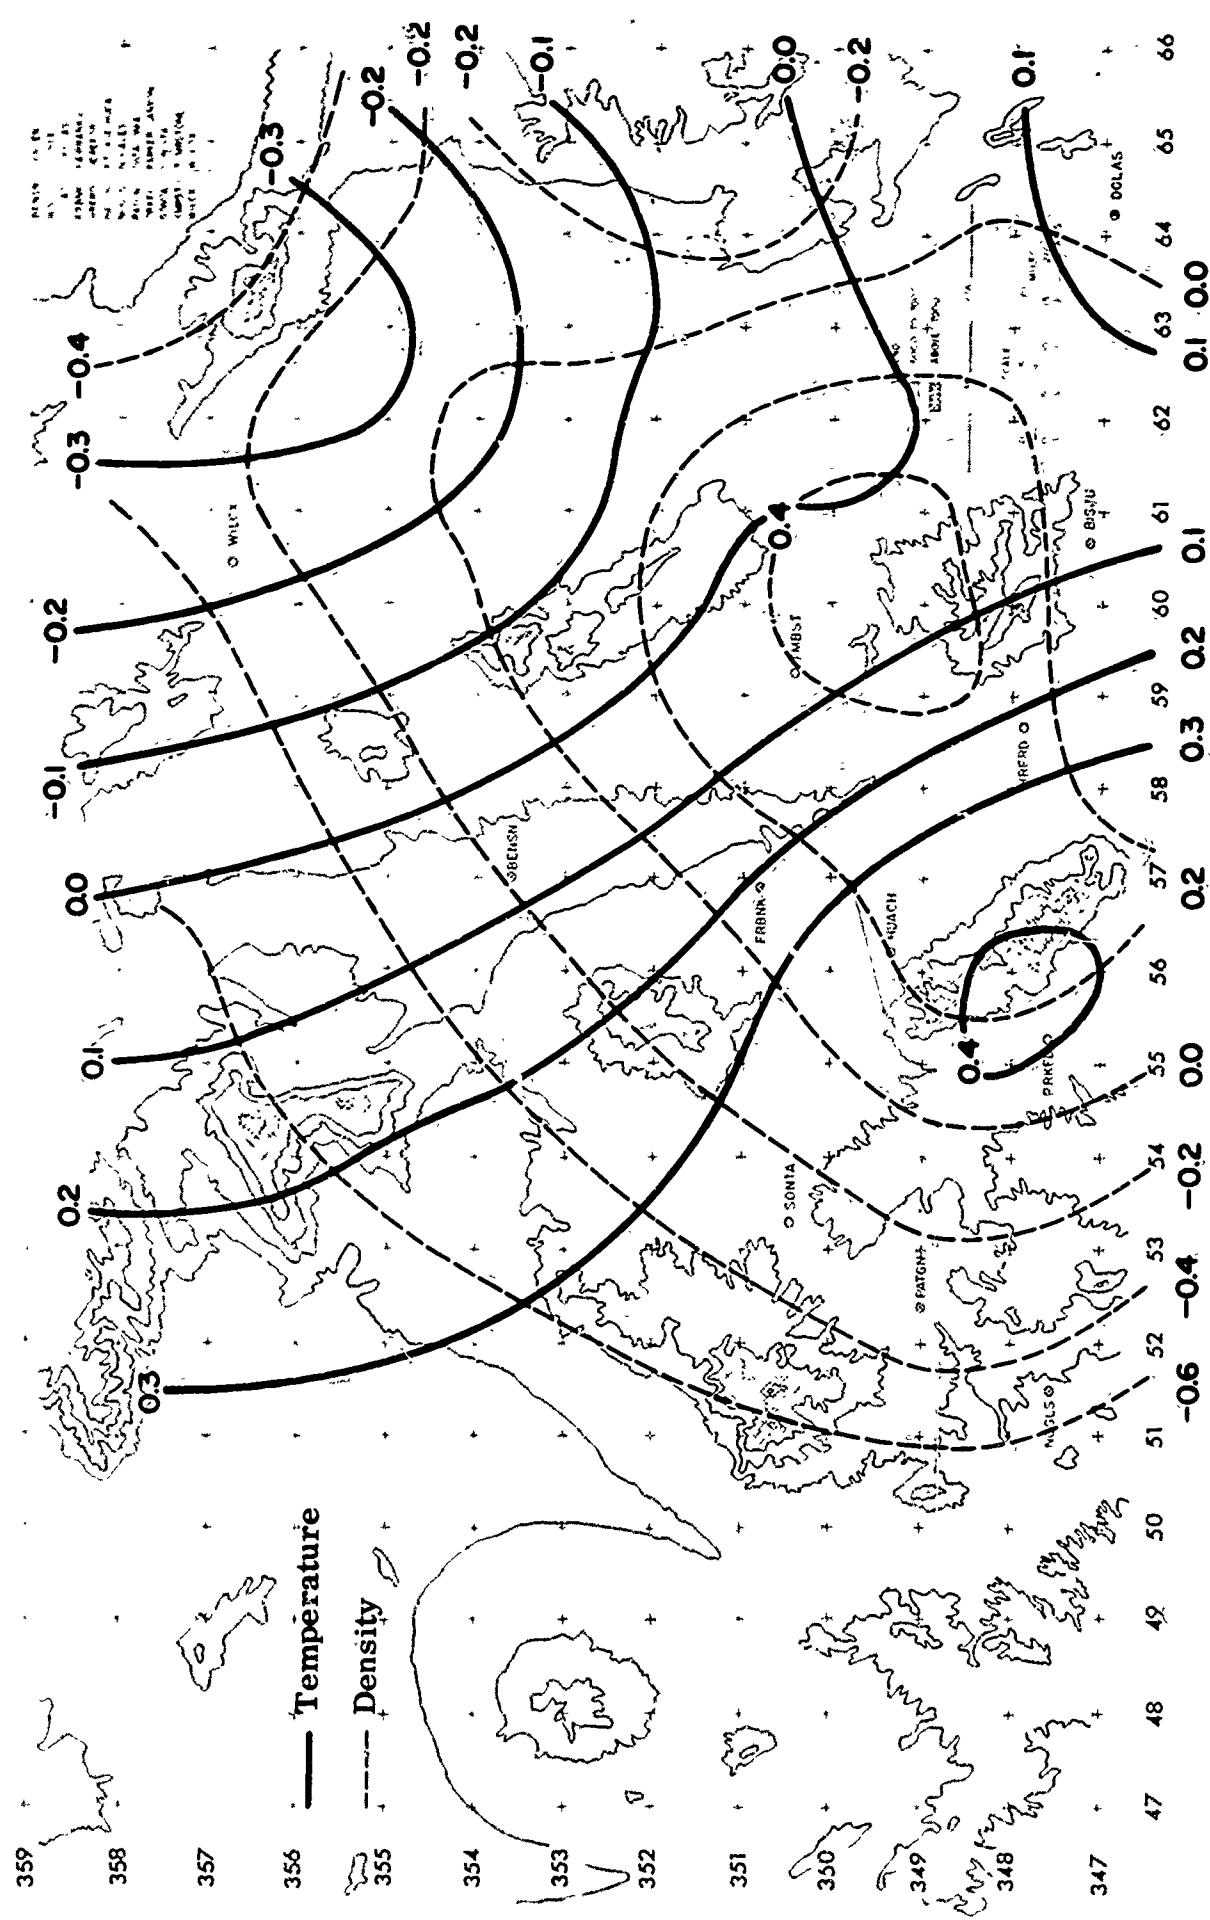
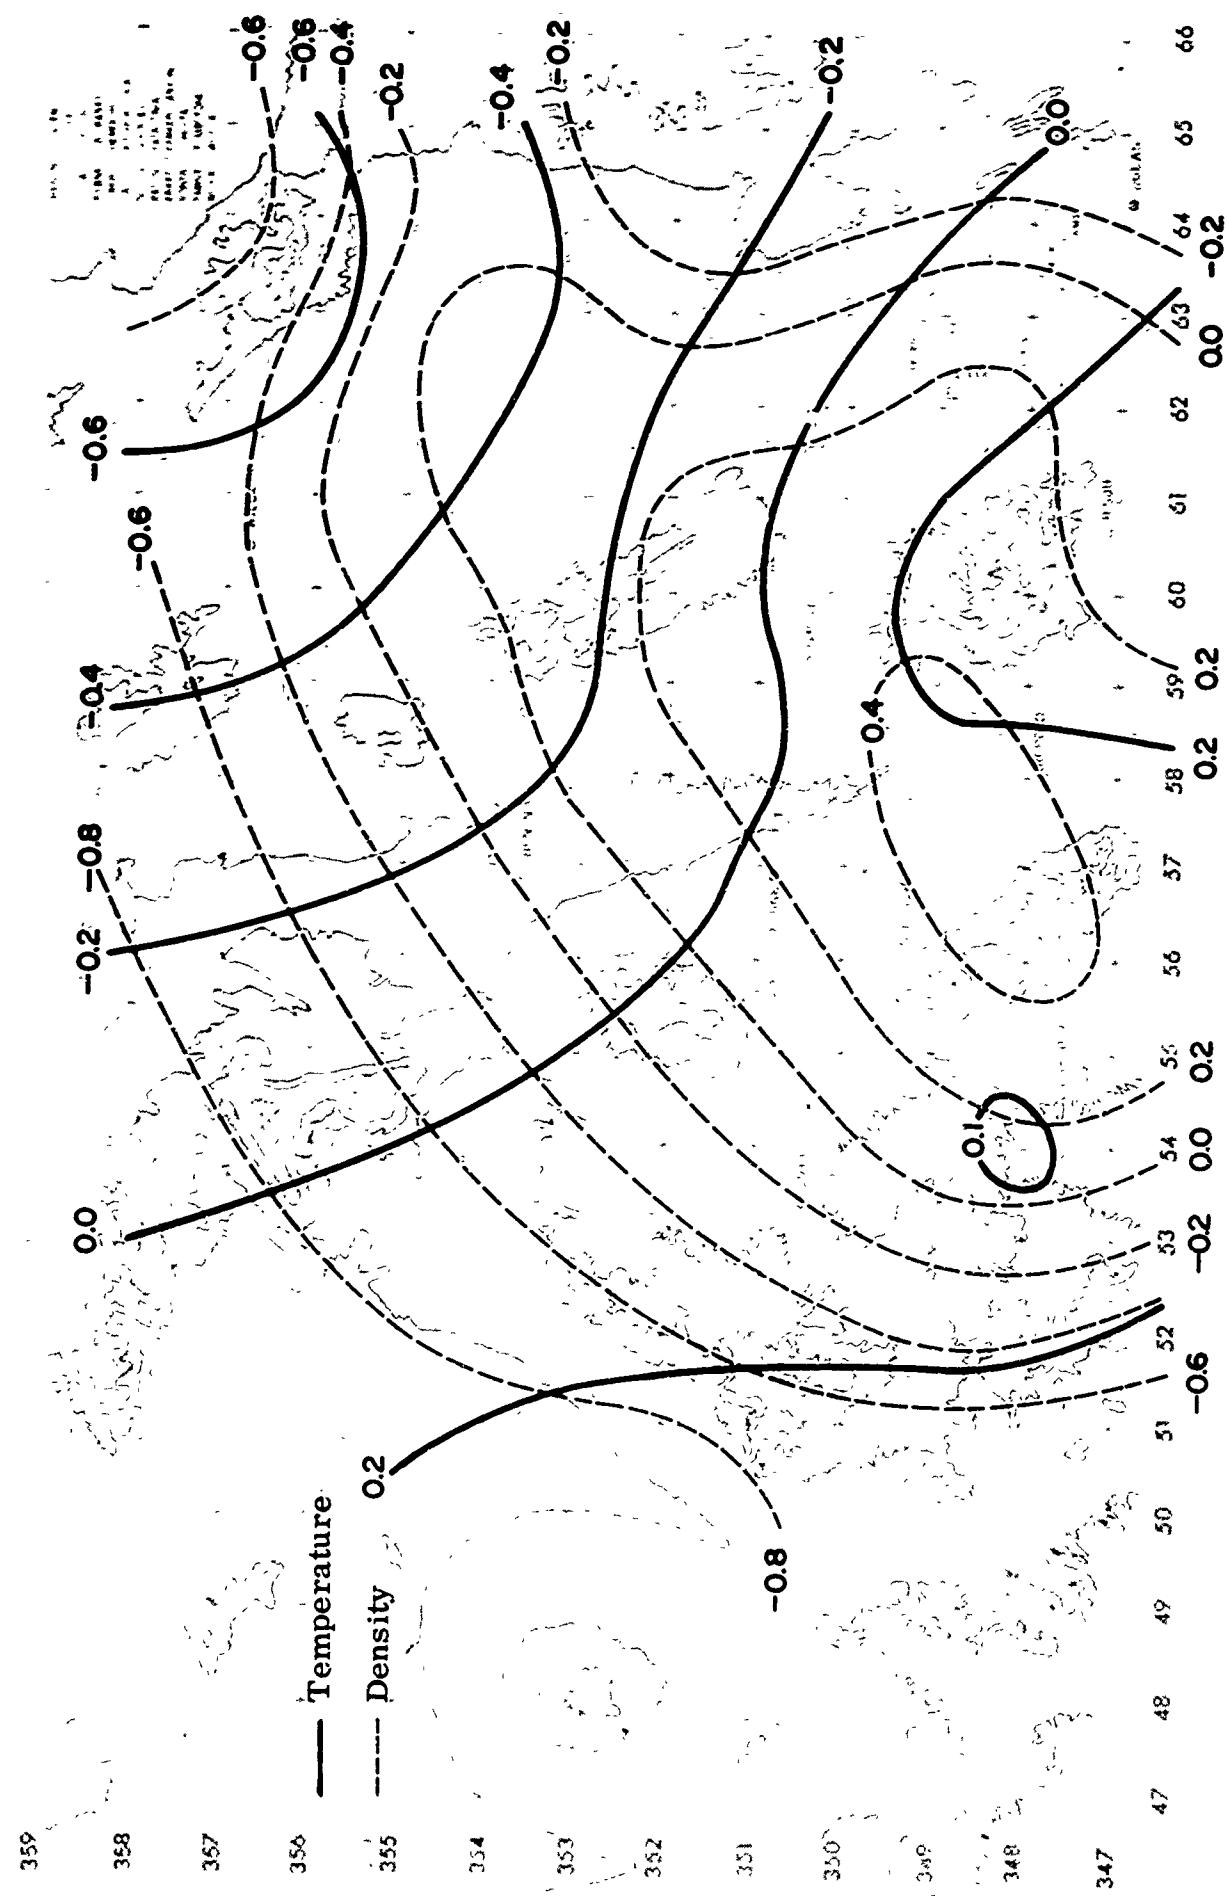


Fig. 2-9. Ballistic temperature and density analysis using CRAM: 1000 MST, 25 January 1965 (percent departure from Standard).



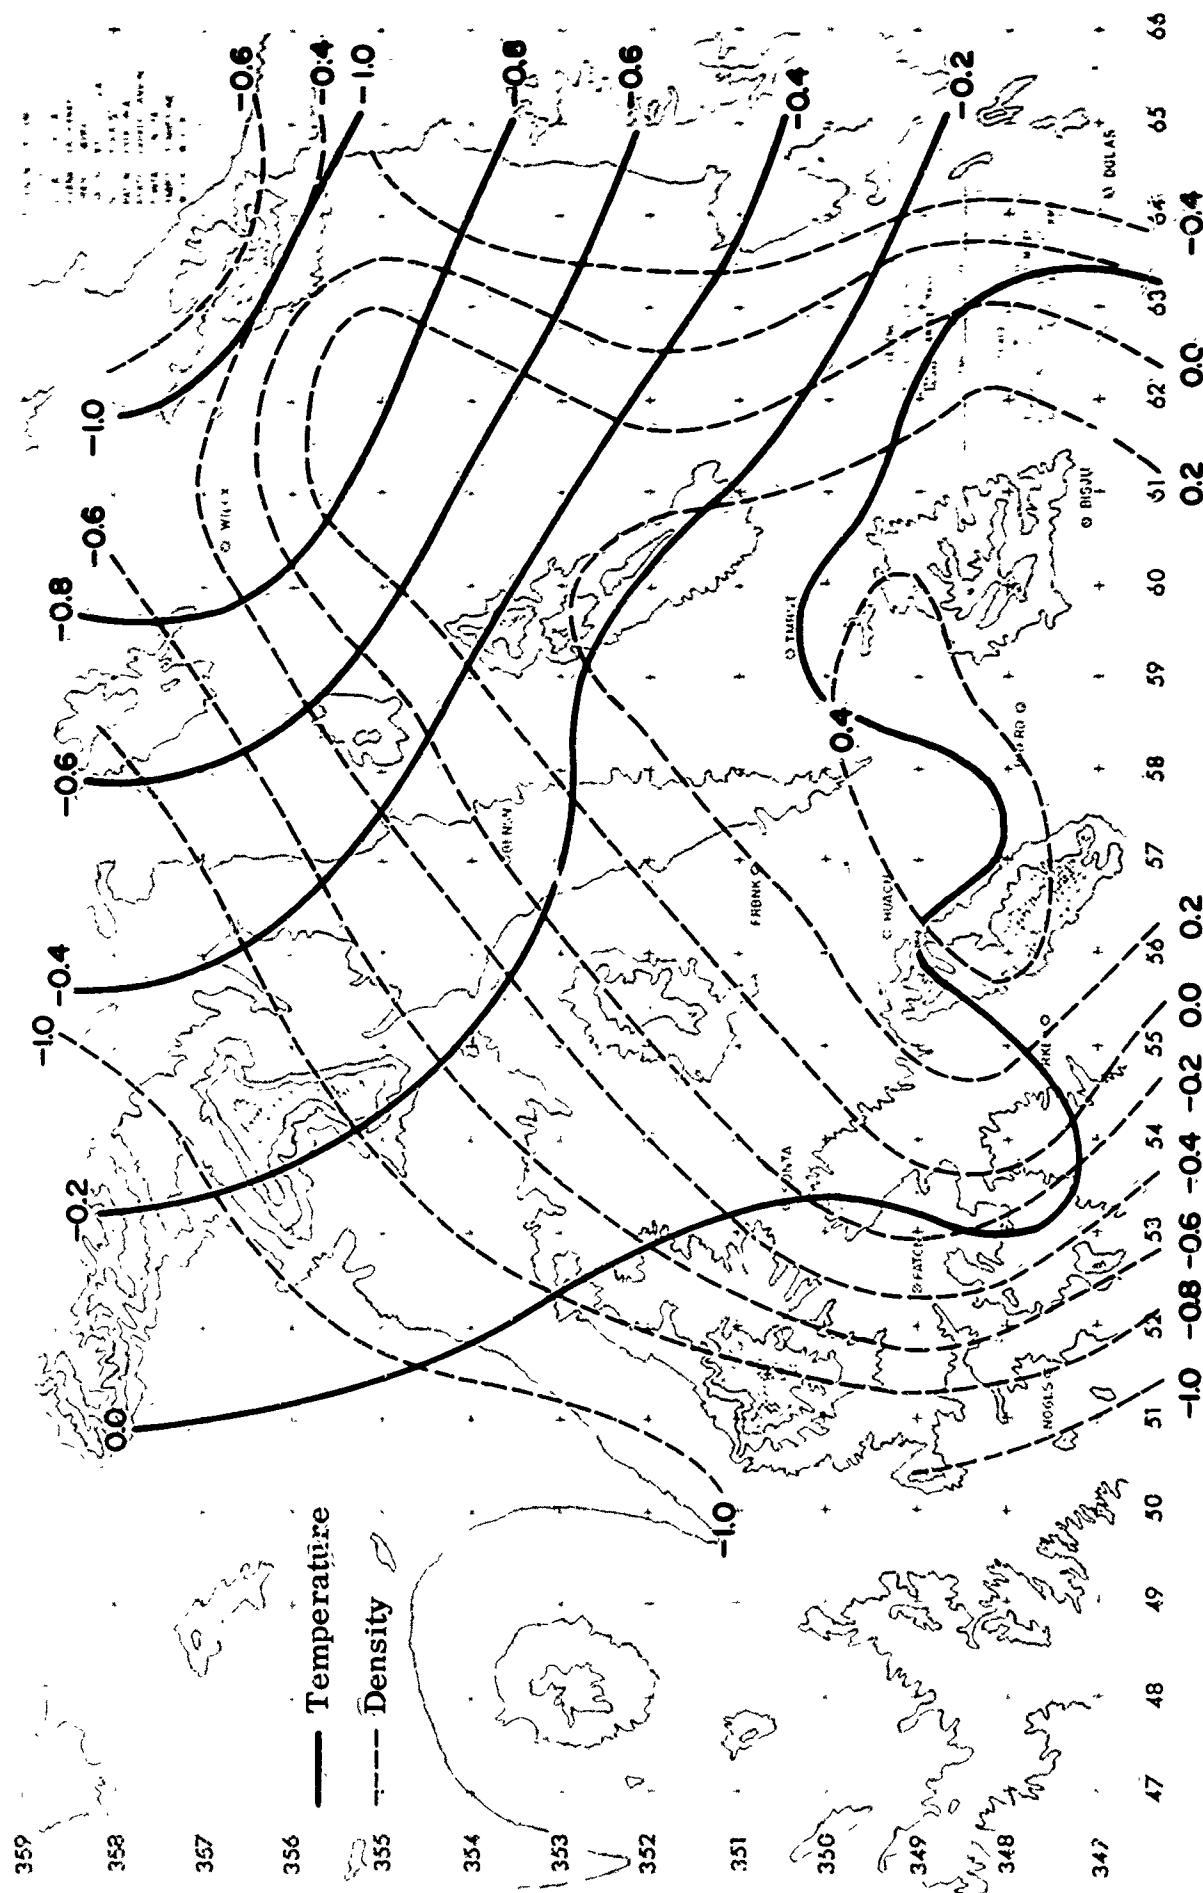


Fig. 2-11. Ballistic temperature and density analysis using CRAM: 1400 MST, 25 January 1965 (percent departure from Standard).

points. Other degrees of smoothing will be tried in the future.

Analyses were produced for each of the ten artillery zones using the procedures outlined above. These zone analyses were then combined into ballistic analyses by computing the weighted sums using the weights given in Table 2-1. Figures 2-2 through 2-6 show the five analyzed fields of ballistic u- and v-wind components (in knots) for 0600, 0800, 1000, 1200, and 1400 MST. The temperature and density analyses are given in Figs. 2-7 through 2-11 (departure from Standard, in percent). The ballistic wind analyses appear much different than those produced by hand in the displaced stations experiment (Figs. 2-7 through 2-11 in Quarterly Report No. 2). This is no doubt due to the fact that no initial guess is used in the hand analyses which leads to a considerable amount of subjectivity in areas of map where there are no data.

The u-component ballistic wind analyses show a gradual weakening trend through the entire map series. A minimum of 84 knots northwest of Douglas can be followed westward map by map reaching an area just west of Ft. Huachuca at 1400 MST. More testing may be required to see if this pattern is realistic or whether it is due to some characteristic of the analysis technique.

Small negative values of the v-component of ballistic wind are present over the southeastern part of the analysis area at 0600 and 0800 MST. At 1000 MST there is a rather sudden change in the eastern part of the region to large negative values which remain for the duration of the series.

The temperature and density analyses (Figs. 2-7 through 2-11) show relatively small gradients with the range of values over an entire map being generally less than 1% of Standard. The temperature values show a cooling trend through the series, reflecting a cooling trend in the upper zones. The surface heating affecting the lower zones does not contribute much to the overall ballistic temperature because of the way the individual zones are weighted (see Table 2-1).

The density fields exhibit increasing gradients during the map series. The maximum values are located in the southern part of the analysis area, with a ridge extending northeastward and becoming more pronounced with time.

The ballistic quantities of u, v, temperature, and density were computed from these analyses at the approximate midpoint of the artillery trajectories and are shown in

Table 2-2. Also shown are those quantities computed from the hand-produced map series contained in Quarterly Report No. 2. In using CRAM, the changes of the values with time in the firing area are generally more gradual than the changes shown by the other analysis methods used. This is due, at least in part, to the incorporation of time in the generation of the initial-guess fields.

Of particular interest is the application of these ballistic corrections to the actual artillery firings that took place at 1000 and 1400 MST for the same day. The provided gun data and unit effects were employed for this purpose. Ballistic temperature and density values were needed to compute the overall correction. These were computed from the CRAM analyses (Figs. 2-9 and 2-11) with the values of 0.34 for temperature and 0.13 for density at 1000 MST and -0.02 for temperature and 0.25 for density at 1400 MST. From fixed station analyses (FXD-1), the values were calculated to be 0.15 and 0.64 at 1000 MST and -0.08 and 0.75 at 1400 MST. Because no values of temperature and density were available from the DISPL and FXD-2 experiments, the FXD-1 values were used for FXD-2 and the CRAM values were used for DISPL. The results are shown in Table 2-3. The target (hypothetical) coordinates are given in meters in

TABLE 2-2
COMPARISON OF BALLISTIC WIND COMPONENTS AT
MIDPOINT OF PROJECTILE TRAJECTORY*

Time (MST)	u-component (knots)				v-component (knots)			
	FXD-1	DISPL	FXD-2	CRAM	FXD-1	DISPL	FXD-2	CRAM
0600	86.2	89.7	91.0	90.8	- 7.7	-10.5	- 8.5	-10.7
0800	82.0	77.5	84.0	81.3	- 9.2	-10.8	-16.5	-12.0
1000	72.8	69.2	85.0	74.8	-16.5	-16.7	-21.5	-16.0
1200	70.7	60.3	75.0	68.1	-17.4	-22.2	-23.0	-17.8
1400	64.8	52.2	68.0	61.0	-17.6	-17.5	-20.0	-15.8

*FXD-1: hand analysis based on fixed stations.

FXD-2: hand analysis based on fixed stations, re-analyzed.

DISPL: hand analysis based on radiosonde displacement.

CRAM: analysis based on CRAM objective analysis.

the Universal Transverse Mercator grid system. The range, deflection, and vector errors designated "NO CORRECTIONS" are based on the distance between the target and the center of impact. The range, deflection, and vector errors "WITH CORRECTIONS" refer to the corrected impact point after the drift, coriolis, and meteorological effects have been accounted for. (Negative range errors refer to impact short of the target and negative deflection errors refer to impact to the left of the target when viewed from the gun location.) Also given are the x and y components of the vector error which, when added to the target coordinates, give the coordinates of the corrected impact point. The corrections due to temperature, density, and range wind effect only the range (negative corrections decrease the range), while corrections due to cross wind effect only the deflection (negative corrections displace the impact point to the left). The variability of the residual error, among the several approaches tested is due mainly to the differences in ballistic winds, with the differences due to temperature and density playing a relatively minor role. These residuals are plotted relative to the target in Fig. 2-12. In most of these impacts, the range error is negative for the corrected impact points. It will be shown in the next section that this negative range error was rather anomalous when compared to several other firing situations.

TABLE 2-3
TEST OF METEOROLOGICAL EFFECTS
(25 January 1965, Gun No. 1, AM & PM)

DATE	GUN CASE	FXD-1 FIXED STATION HAND ANALYSIS	DISPL DISPLACED RAOUSONDE HAND ANALYSIS
25JAN65 A 1 17			
	-NO CORRECTIONS-	-----WITH CORRECTIONS-----	-----WITH CORRECTIONS-----
TARGET	VECT.	RANGE DEFLTN	X
COORDINATES	ERROR	VECT.	Y
34 97847.5N 569430.8E	842.5	1621.7	559.3
METEOR. PARAMETER	METEOR.	UNIT EFFECT	CORRECTION
TEMPERATURE	•15	-12.17	-1.83
DENSITY	•64	60.40	38.66
RANGE WIND	65.8	-20.12	-1323.27
CROSS WIND	35.3	-14.45	-510.17
CORIOLIS CORRECTION=	30.19	DRIFT CORRECTION= 741.19	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
DATE	GUN CASE		
25JAN65 A 1 17			
	-NO CORRECTIONS-	-----WITH CORRECTIONS-----	-----WITH CORRECTIONS-----
TARGET	VECT.	RANGE DEFLTN	X
COORDINATES	ERROR	VECT.	Y
34 97847.5N 569430.8E	842.5	1621.7	537.0
METEOR. PARAMETER	METEOR.	UNIT EFFECT	CORRECTION
TEMPERATURE	•34	-12.17	-4.14
DENSITY	•13	60.40	7.85
RANGE WIND	62.2	-20.12	-1252.39
CROSS WIND	34.5	-14.45	-499.09
CORIOLIS CORRECTION=	30.19	DRIFT CORRECTION= 741.19	

TABLE 2-3 (continued)

DATE GUN CASE
25JAN65 A 1 17

FXD-2 RE-ANALYZED FIXED STATION HAND ANALYSIS

		-NO CORRECTIONS-			WITH CORRECTIONS-----		
TARGET	VECT.	RANGE	DEFL TN	VECT.	RANGE	DEFL TN	X Y
COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.
3497847.5N 569430.8E	1827.5	842.5	1621.7	690.9	-653.7	223.5	-570.5 -389.7
METEOR. PARAMETER	METEOR.	VALUE		UNIT EFFECT		CORRECTION	
TEMPERATURE		.15		-12.17		-1.83	
DENSITY		.64		60.40		38.66	
RANGE WIND		76.2		-20.12		-1533.05	
CROSS WIND		43.4		-14.45		-626.79	
CORIOLIS CORRECTION=		30.19		DRAFT CORRECTION=		741.19	
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX							
DATE GUN CASE							
25JAN65 A 1 17			CRAM				
		-NO CORRECTIONS-			WITH CORRECTIONS-----		
TARGET	VECT.	RANGE	DEFL TN	VECT.	RANGE	DEFL TN	X Y
COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.
3497847.5N 569430.8E	1827.5	842.5	1621.7	619.7	-518.5	339.4	-409.3 -465.3
METEOR. PARAMETER	METEOR.	VALUE		UNIT EFFECT		CORRECTION	
TEMPERATURE		.34		-12.17		-4.14	
DENSITY		.13		60.40		7.85	
RANGE WIND		67.8		-20.12		-1364.74	
CROSS WIND		35.4		-14.45		-510.91	
CORIOLIS CORRECTION=		30.19		DRAFT CORRECTION=		741.19	
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX							

TABLE 2-3 (continued)

DATE		GUN CASE		FXD-1 FIXED STATION HAND ANALYSIS							
				NO CORRECTIONS				WITH CORRECTIONS			
				VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	Y
TARGET	COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.	COMP.
3497850.7N	569442.2E	1698.8	930.7	1421.2	241.4	-186.0	153.9	-138.3	-197.9		
METEOR. PARAMETER	METEOR.	VALUE			UNIT EFFECT				CORRECTION		
TEMPERATURE		-•08			-8.98				.72		
DENSITY		•75			60.51				45.38		
RANGE WIND		57.8			-20.13				-1162.82		
CROSS WIND		34.2			-14.46				-495.02		
CORIOLIS CORRECTION=		30.23			DRAFT CORRECTION=				742.00		
XXXXXXXXXXXXXXXXXXXXXX:XXXXXXXXXXXXXXXXXXXXXXXXXXXXXX											
DATE		GUN CASE		DISPL DISPLACED RADIOSONDE HAND ANALYSIS							
				NO CORRECTIONS				WITH CORRECTIONS			
				VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	Y
TARGET	COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.	COMP.
3497850.7N	569442.2E	1698.8	930.7	1421.2	205.6	27.1	203.8	80.4	-189.3		
METEOR. PARAMETER	METEOR.	VALUE			UNIT EFFECT				CORRECTION		
TEMPERATURE		-•02			-8.98				*18		
DENSITY		•25			60.51				15.13		
RANGE WIND		45.6			-20.13				-918.89		
CROSS WIND		30.8			-14.46				-445.07		
CORIOLIS CORRECT'ION=		30.23			DRAIFT CORRECTION=				742.00		

TABLE 2-3 (continued)

		FXD-2 RE-ANALYZED FIXED STATION HAND ANALYSIS			
		-NO CORRECTIONS-		WITH CORRECTIONS-----	
		VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN
		ERROR	ERROR	ERROR	X Y
DATE	GUN CASE	COORDINATES	3497850.7N 569442.2E	1698.8	930.7 1421.2 258.9 -235.2 108.1 -197.9 -166.9
25JAN65 P 1 19		METEOR. PARAMETER	TEMPERATURE	-•08	-8.98 •72
		DENSITY		•75	60.51 45.38
		RANGE WIND		60.2	-20.13 -1212.02
		CROSS WIND		37.4	-14.46 -540.81
		CORIOLIS CORRECTION=	30.23	DRAFT CORRECTION=	742.00
		XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX			
DATE	GUN CASE	COORDINATES	3497850.7N 569442.2E	1698.8	930.7 1421.2 246.6 -152.8 193.6 -95.6 -227.3
25JAN65 P 1 19		METEOR. PARAMETER	TEMPERATURE	-•02	-8.98 •18
		DENSITY		•25	60.51 15.13
		RANGE WIND		54.6	-20.13 -1098.75
		CROSS WIND		31.5	-14.46 -455.29
		CORIOLIS CORRECTION=	30.23	DRAFT CORRECTION=	742.00

TABLE 2-3 (continued)

DATE	GUN CASE	HUACH SINGLE STATION	CORRECTIONS-----						CORRECTIONS-----	
			-NO CORRECTIONS-			WITH			CORRECTIONS-----	
TARGET	VECT.	RANGE DEFLTN	VECT.	RANGL	DEFLTN	X	Y		COMP.	COMP.
COORDINATES 3497850.7N 569442.2E	1698.8	930.7	1421.2	238.8	-192.5	141.2	-147.9	-187.4		
METEOR. PARAMETER	ME TEOR.	VALUE	UNIT EFFECT	CORRECTION						
TEMPERATURE	- • 08		-8 • 98	• 72						
DENSITY	• 70		60 • 51						42 • 36	
RANGE WIND	57 • 9		-20 • 13						-1166 • 28	
CROSS WIND	35 • 1		-14 • 46						-507 • 72	
CORIOLIS CORRECTION=	30 • 23		DRIFT CORRECTION=	742 • 00						
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX										

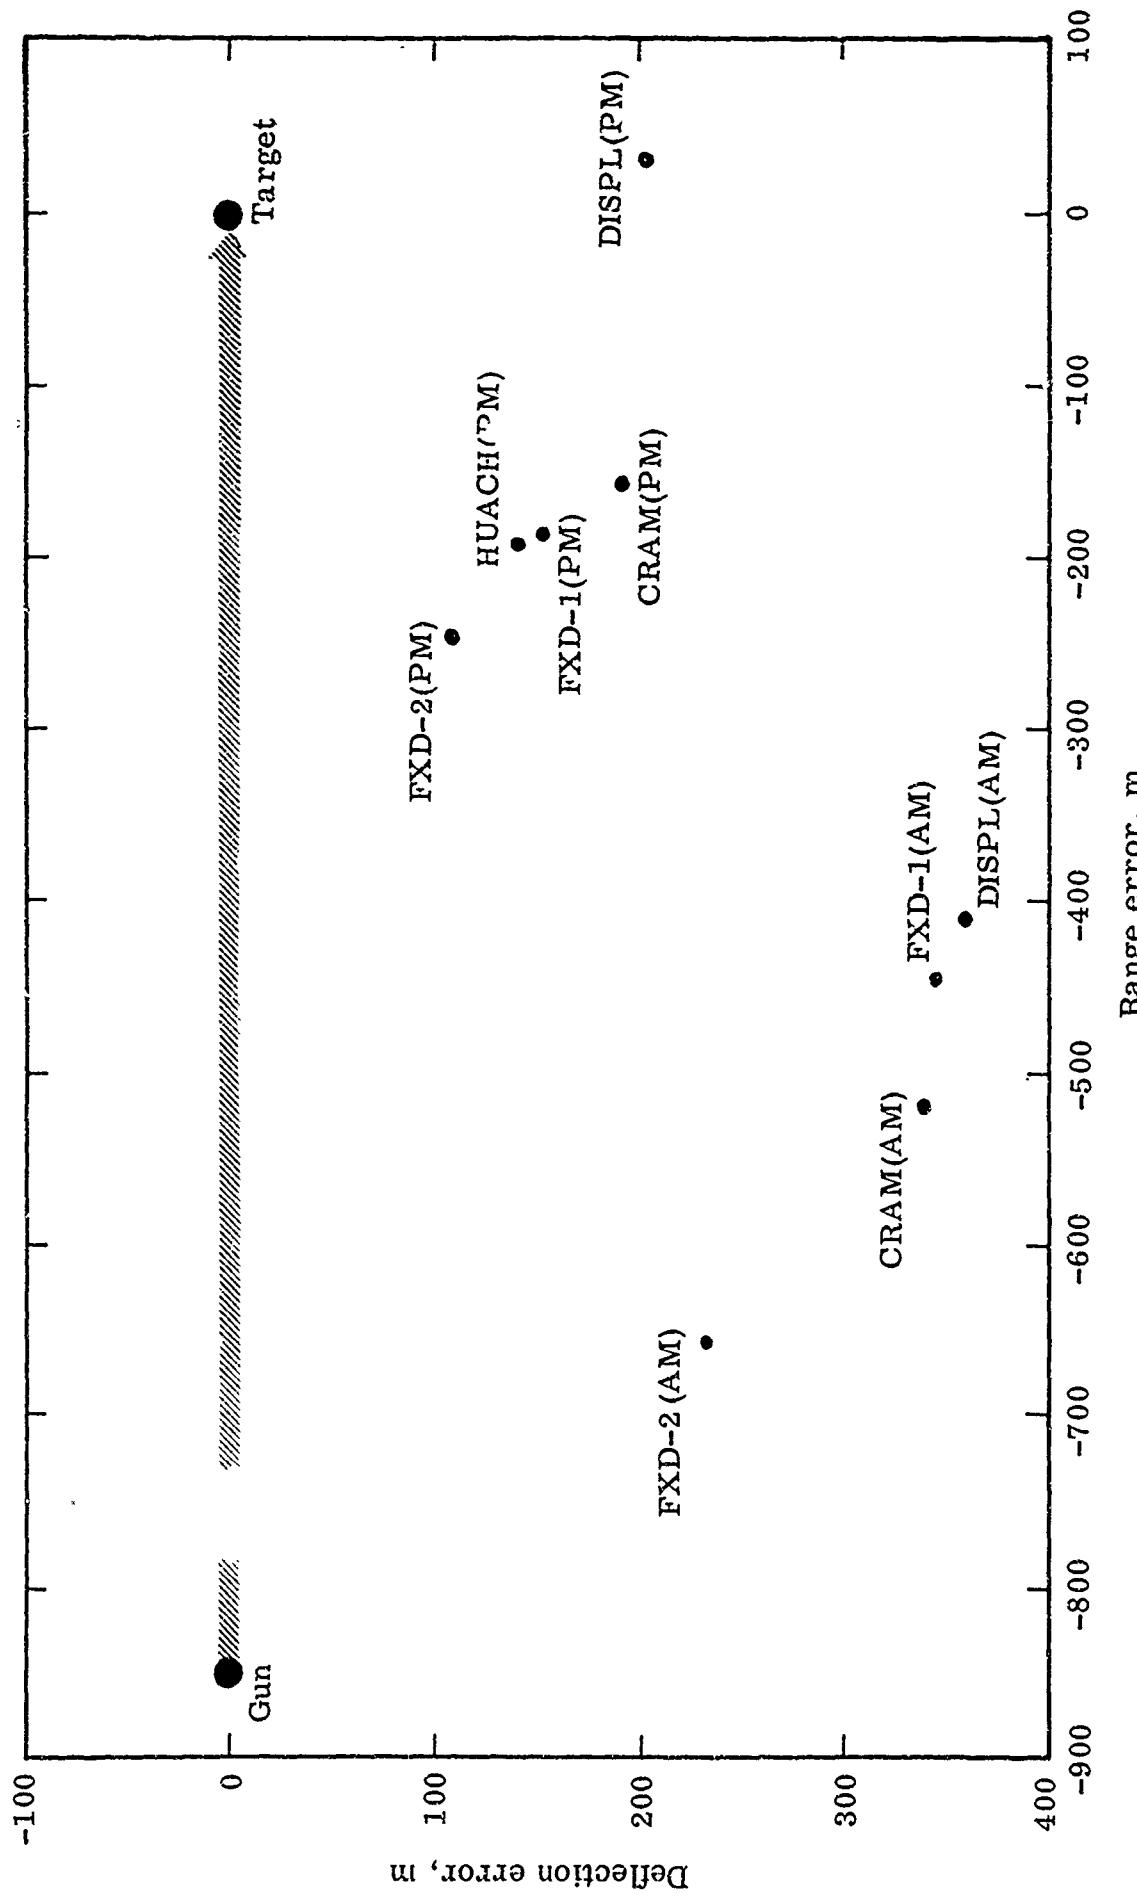


Fig. 2-12. Residual errors for 1000 MST (AM) and 1400 MST (PM) firings (Gun No. 1) on 25 January 1965 using corrections based on various analysis procedures (from Table 2-3).

3.0 CORRECTIONS BASED ON A SINGLE STATION

A small computer program was written for the IBM 1620 which makes the necessary geometrical and trigonometrical steps to systematically modify a given impact point with given meteorological parameters and unit effects in order to yield a corrected impact point. The program prints out the corrections and the various error statistics. By computing this information for all available firing times and using the Ft. Huachuca sounding as the only basis for computing meteorological questions, the resulting data could be used to study the general pattern of the impact points. The data also provided a useful control in comparing results from the objective analysis technique.

The gun data resulted from the firings of two 8-inch howitzers, each firing about ten rounds, alternatively, at one minute intervals. For a given day there were two firing times: 1000 MST and 1400 MST. The locations of the individual impact points were averaged to give a center of impact (CI) for each gun's firing. These data were supplied by the sponsor. The coordinates of the two guns and their azimuths are as follows:

Gun No. 1:	3493987.7N	555472.8E	1325.2 mils, Grid North
Gun No. 2:	3494002.5N	555469.4E	1322.8 mils, Grid North

Of the 24 firing times, there were 19 for which the Ft. Huachuca sounding yielded line-10 ballistic data. The corrections were applied to the appropriate CI's by using the IBM 1620 program written for that purpose. The results are given in Table 3-1 and in Figs. 3-1 and 3-2, which show the corrected CI's relative to the target. It is immediately obvious that there is a preponderance of corrected impact points for which the range error is positive (too long). The reason for this is not known at the present time. There does not appear to be any noticeable bias in the deflection errors. Table 3-2 shows a summary of the error statistics. In addition to the range bias, the total shows that there is no appreciable difference in errors resulting from Gun No. 1 and Gun No. 2 firings.

TABLE 3-1
ARTILLERY CORRECTIONS BASED ON FT. HUACHUCA
METEOROLOGICAL SOUNDINGS*

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	NO CORRECTIONS				WITH CORRECTIONS			
16JAN65	A 1 1		TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X
COORDINATES			COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	Y
34°97'8.38" N	56°9'39.9" E		34°97'8.38" N	56°9'39.9" E	812.2	403.6	704.9	307.7	304.4	45.4
METEOR. PARAMETER	METEOR.	VALUE	METEOR.	VALUE	UNIT EFFECT		METEOR.	VALUE	UNIT EFFECT	CORRECTION
TEMPERATURE	3.38	-12.29	TEMPERATURE	3.38	-12.29		TEMPERATURE	3.38	-12.21	-41.41
DENSITY	-•.23	67.45	DENSITY	-•.23	67.45		DENSITY	-•.23	67.16	-15.51
RANGE WIND	2.1	-20.07	RANGE WIND	2.1	-20.07		RANGE WIND	2.1	-20.03	-42.26
CROSS WIND	-7.6	-14.40	CROSS WIND	-7.6	-14.40		CROSS WIND	-7.6	-14.41	109.65
CORIOLIS CORRECTION=	30.09		CORIOLIS CORRECTION=	30.09		DRAIFT CORRECTION=	30.09		DRAIFT CORRECTION=	739.01
XXXXXXXXXXXXXXXXXXXXXX			XXXXXXXXXXXXXXXXXXXXXX			XXXXXXXXXXXXXXXXXXXXXX			XXXXXXXXXXXXXXXXXXXXXX	
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	NO CORRECTIONS				WITH CORRECTIONS			
16JAN65	A 2 2		TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X
COORDINATES			COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	Y
34°97'8.67" N	56°9'32.0" E		34°97'8.67" N	56°9'32.0" E	798.9	410.7	685.3	312.4	311.4	24.4
METEOR. PARAMETER	METEOR.	VALUE	METEOR.	VALUE	UNIT EFFECT		METEOR.	VALUE	UNIT EFFECT	CORRECTION
TEMPERATURE	3.38	-12.21	TEMPERATURE	3.38	-12.21		TEMPERATURE	3.38	-12.21	-41.27
DENSITY	-•.23	67.16	DENSITY	-•.23	67.16		DENSITY	-•.23	67.16	-15.45
RANGE WIND	2.1	-20.03	RANGE WIND	2.1	-20.03		RANGE WIND	2.1	-20.03	-42.53
CROSS WIND	-7.6	-14.41	CROSS WIND	-7.6	-14.41		CROSS WIND	-7.6	-14.41	109.65
CORIOLIS CORRECTION=	29.80		CORIOLIS CORRECTION=	29.80		DRAIFT CORRECTION=	29.80		DRAIFT CORRECTION=	740.77

* Ft. Huachuca soundings were not available for Cases 11, 12, 13, 14, 17, 18, 31, 32, 41, and 42.

TABLE 3-1 (continued)

DATE		GUN CASE		HUACH 10 ZONES FIXED STATION		CORRECTIONS-----		WITH CORRECTIONS-----			
						NO	VECT.	RANGE	DEFLTN	X	Y
						CORRECTIONS	VECT.	DEFLTN	ERROR	COMP.	COMP.
TARGET		COORDINATES		VECT.	DEFLTN	VECT.	RANGE	DEFLTN	X	Y	
3497872.5N	569520.9E	3497883.8N	569378.0E	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.	162.3
METEOR. PARAMETER		METEOR. VALUE									
TEMPERATURE		3.65			-11.90						-43.44
DENSITY		-0.69			68.67						-47.38
RANGE WIND		1.5			-20.25						-30.61
CROSS WIND		1.7			-14.58						-24.25
CORIOLIS CORRECTION=	30.48					DRIFT CORRECTION=	747.44				
XX											
DATE		GUN CASE		HUACH 10 ZONES FIXED STATION		CORRECTIONS-----		WITH CORRECTIONS-----		CORRECTIONS-----	
						NO	VECT.	RANGE	DEFLTN	X	Y
						CORRECTIONS	VECT.	DEFLTN	ERROR	COMP.	COMP.
TARGET		COORDINATES		VECT.	DEFLTN	VECT.	RANGE	DEFLTN	X	Y	
3497883.8N	569378.0E	3497883.8N	569378.0E	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.	188.2
METEOR. PARAMETER		METEOR. VALUE									
TEMPERATURE		3.65			-12.04						-43.95
DENSITY		-0.69			67.74						-46.74
RANGE WIND		1.5			-20.12						-30.33
CROSS WIND		1.7			-14.50						-24.16
CORIOLIS CORRECTION=	29.99					DRIFT CORRECTION=	744.81				

TABLE 3-1 (continued)

DATE		GUN CASE		HUACH 10 ZONES FIXED STATION							
18JAN65	A 1	S		-NO CORRECTIONS-		-WITH CORRECTIONS-					
TARGET		VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	Y		
COORDINATES		ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.		
3497865•ON	569494•OE	1092•7	500•2	971•4	305•3	296•0	-74•9	265•3	151•1		
METEOR. PARAMETER		METEOR. VALUE			UNIT EFFECT			CORRECTION			
TEMPERATURE		4•16			-11•98			-49•84			
DENSITY		-•68			68•40			-46•51			
RANGE WIND		5•3			-20•21			-107•86			
CROSS WIND		18•6			-14•54			-270•37			
CORIOLIS CORRECTION=		30•4C			DRAFT CORRECTION=	745•57					
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX											
DATE		GUN CASE		HUACH 10 ZONES FIXED STATION							
18JAN65	A 2	S		-NO CORRECTIONS-		-WITH CORRECTIONS-					
TARGET		VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	Y		
COORDINATES		ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.		
3497882•1N	569371•7E	1073•8	540•8	927•6	357•6	338•2	-116•4	294•4	203•0		
METEOR. PARAMETER		METEOR. VALUE			UNIT EFFECT			CORRECTION			
TEMPERATURE		4•16			-12•07			-50•21			
DENSITY		-•68			67•68			-46•02			
RANGE WIND		5•3			-20•11			-106•45			
CROSS WIND		18•6			-14•49			-269•62			
CORIOLIS CORRECTION=		29•97			DRAFT CORRECTION=	744•37					

TABLE 3-1 (continued)

DATE GUN CASE				HUACH 10 ZONES FIXED STATION			
				-NO CORRECTIONS-			
TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	CORRECTIONS-----
COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	Y
3497874.0N	569526.7E	1106.2	620.8	915.6	240.9	-16.1	227.4
							79.5
METEOR. PARAMFTER	ME TEOR.	VALU E	UNIT EFFECT				CORRECTION
TEMPERATURE	4.14	-11.86	-49.10				
DENSITY	-1.03	68.77	-70.83				
RANGE WIND	12.9	-20.25	-260.31				
CROSS WIND	10.5	-14.58	-153.22				
CORIOLIS CORRECTION=	30.48		DRAIFT CORRECTION=	747.92			
XX							
DATE GUN CASE				HUACH 10 ZONES FIXED STATION			
				-NO CORRECTIONS-			
TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	CORRECTIONS-----
COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	Y
3497869.3N	5694.33.6E	1060.3	605.8	870.2	235.2	226.8	201.7
							121.0
METEOR. PARAMFTER	ME TEOR.	VALU E	UNIT EFFECT				CORRECTION
TEMPERATURE	4.14	-11.90	-49.27				
DENSITY	-1.03	68.28	-70.33				
RANGE WIND	12.8	-20.20	-259.36				
CROSS WIND	10.5	-14.58	-153.66				
CORIOLIS CORRECTION=	30.18		DRAIFT CORRECTION=	748.65			

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	CORRECTIONS						
20JAN65	A 1 9		-NO CORRECTIONS-	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X	Y
				ERROR	ERROR	ERROR	ERROR	COMP.	COMP.
TARGET									
COORDINATES	3497867•6N 569503•3E	1204•2	989•6	686•2	140•4	133•0	45•2	140•2	-8•1
METEOR. PARAMETER		METEOR. VALUE							
TEMPERATURE		•22							
DENSITY		-•16							
RANGE WIND		41•7							
CROSS WIND		-9•3							
CORIOLIS CORRECTION=	30•43								
			DRAFT CORRECTION=	746•22					
			XXXXXXXXXXXXXXXXXXXXXXXXXXXXXX						
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	CORRECTIONS						
20JAN65	A 2 10		-NO CORRECTIONS-	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X	Y
				ERROR	ERROR	ERROR	ERROR	COMP.	COMP.
TARGET									
COORDINATES	3497893•4N 569412•2E	1155•1	959•0	643•9	104•1	104•1	•3	100•5	27•2
METEOR. PARAMETER		METEOR. VALUE							
TEMPERATURE		•22							
DENSITY		-•16							
RANGE WIND		41•7							
CROSS WIND		-9•2							
CORIOLIS CORRECTION=	30•10								
			DRAFT CORRECTION=	747•19					
			XXXXXXXXXXXXXXXXXXXXXXXXXXXXXX						

TABLE 3-1 (continued)

DATE	GUN	CASE	HUACH 10 ZONES FIXED STATION						
22JAN65	P 1	15	-NO CORRECTIONS-	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X	Y
TARGET			ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.
COORDINATES	3497867.3N	569502.2E	1673.1	946.8	1578.0	645.9	556.3	-328.2	448.7
METEOR. PARAMETER	METEOR.	VALUE							
TEMPERATURE		-•15				-8.77		1.32	
DENSITY		•24				61.01		14.64	
RANGE WIND		20.2				-20.22		-408.47	
CROSS WIND		63.9				-14.55		-929.68	
CORIOLIS CORRECTION=		30.43							
			DRAFT	CORRECTION=	746.13				
			XXXXXXXXXXXXXXXXXXXXXX						
DATE	GUN	CASE	HUACH 10 ZONES FIXED STATION						
22JAN65	P 2	16	-NO CORRECTIONS-	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X	Y
TARGET			ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.
COORDINATES	3497877.0N	569353.4E	1663.1	981.0	1342.3	693.1	595.1	-355.3	477.7
METEOR. PARAMETER	METEOR.	VALUE							
TEMPERATURE		-•15				-8.98		1.35	
DENSITY		•24				60.15		14.44	
RANGE WIND		20.1				-20.08		-402.61	
CROSS WIND		63.9				-14.46		-924.61	
CORIOLIS CORRECTION=		29.91							
			DRAFT	CORRECTION=	743.08				

TABLE 3-1 (continued)

DATE		GUN CASE		HUACH 10 ZONES FIXED STATION				WITH CORRECTIONS-----Y			
				TARGET	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X	ERROR	COMP.
3497850•7N	569442•2E	1698•8	930•7	1421•2	238•8	-192•5	141•2	-147•9	-167•4		
METEOR. PARAMETER	METEOR.	VALUE		UNIT EFFECT			UNIT EFFECT			CORRECTION	
TEMPERATURE	-08			-8•98			-8•98			•72	
DENSITY	•70			60•51			60•51			42•36	
RANGE WIND	57•9			-20•13			-20•13			-1166•28	
CROSS WIND	35•1			-14•46			-14•46			-507•72	
CORIOLIS CORRECTION=	30•23			DRIIFT CORRECTION=	742•00						
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX											
DATE		GUN CASE		HUACH 10 ZONES FIXED STATION				WITH CORRECTIONS-----Y			
				TARGET	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X	ERROR	COMP.
3497849•9N	569256•5E	1651•3	957•0	1345•7	171•1	-153•8	175•0	-128•0	-113•5		
METEOR. PARAMETER	METEOR.	VALUE		UNIT EFFECT			UNIT EFFECT			CORRECTION	
TEMPERATURE	-08			-9•33			-9•33			•75	
DENSITY	•70			59•34			59•34			41•54	
RANGE WIND	57•9			-19•93			-19•93			-1153•04	
CROSS WIND	35•2			-14•32			-14•32			-504•75	
CORIOLIS CORRECTION=	29•60			DRIIFT CORRECTION=	736•35						

TABLE 3-1 (continued)

DATE GUN CASE			HUACH 10 ZONES FIXED STATION									
27JAN65 A 1 21												
TARGET		COORDINATES		NO CORRECTIONS		WITH CORRECTIONS		CORRECTIONS				
3497841•3N	569408•3E	1121•1	373•5	VECT• ERROR	RANGE DEFLTN ERROR	VECT• ERROR	RANGE DEFLTN ERROR	X COMP•	Y COMP•			
METEOR• PARAMETER		METEOR•	VALUE	UNIT EFFECT		CORRECTION						
TEMPERATURE			•19	-12•22		-2•32						
DENSITY			1•66	60•22		99•97						
RANGE WIND			13•6	-20•08		-273•36						
CROSS WIND			19•4	-14•41		-280•00						
CORIOLIS CORRECTION=		30•12		DRIFT CORRECTION=		739•65						
XX												
DATE GUN CASE			HUACH 10 ZONES FIXED STATION									
27JAN65 A 2 22												
TARGET		COORDINATES		NO CORRECTIONS		WITH CORRECTIONS		CORRECTIONS				
3497864•0N	569307•1E	1061•0	397•1	VECT• ERROR	RANGE DEFLTN ERROR	VECT• ERROR	RANGE DEFLTN ERROR	X COMP•	Y COMP•			
METEOR• PARAMETER		METEOR•	VALUE	UNIT EFFECT		CORRECTION						
TEMPERATURE			•19	-12•25		-2•33						
DENSITY			1•66	59•77		99•22						
RANGE WIND			13•6	-20•01		-271•49						
CROSS WIND			19•5	-14•39		-280•08						
CORIOLIS CORRECTION=		29•76		DRIFT CORRECTION=		739•87						

TABLE 3-1 (continued)

DATE GUN CASE			HUACH 10 ZONES FIXED STATION			WITH CORRECTIONS-----		
			NO CORRECTIONS	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X Y
TARGET	COORDINATES	VECT.	DEFLTN	ERROR	ERROR	DEFLTN	ERROR	COMP. COMP.
3497870.0N	569512.1E	1115.3	508.8	992.5	247.2	234.8	-77.2	205.7 137.0
METEOR. PARAMETER	METEOR.	VALUE		UNIT EFFECT		CORRECTION		
TEMPERATURE		.33		-11.93		-3.94		
DENSITY		.99		61.10		60.49		
RANGE WIND		16.3		-20.23		-330.54		
CROSS WIND		20.1		-14.56		-292.38		
CORIOLIS CORRECTION=		30.45		DRAFT CORRECTION=		746.84		
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX								
DATE GUN CASE			HUACH 10 ZONES FIXED STATION			WITH CORRECTIONS-----		
			NO CORRECTIONS	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X Y
TARGET	COORDINATES	VECT.	DEFLTN	ERROR	ERROR	DEFLTN	ERROR	COMP. COMP.
3497886.6N	569388.0E	1088.7	541.0	944.8	295.6	268.9	-122.7	226.1 190.5
METEOR. PARAMETER	METEOR.	VALUE		UNIT EFFECT		CORRECTION		
TEMPERATURE		.33		-12.01		-3.96		
DENSITY		.99		60.46		59.86		
RANGE WIND		16.3		-20.13		-327.95		
CROSS WIND		20.1		-14.51		-291.93		
CORIOLIS CORRECTION=		30.02		DRAFT CORRECTION=		745.51		

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION
29JAN65 A 1 25		
-NO CORRECTIONS-		
TARGET	VECT.	RANGE DEFLTN
COORDINATES	ERROR	ERROR
3497843.5N 569416.3E	195.4	860.7
METEOR. PARAMETER	METEOR. VALUE	UNIT EFFECT
TEMPERATURE	1.79	-12.20
DENSITY	--.03	67.63
RANGE WIND	-13.9	-20.84
CROSS WIND	3.6	-14.42
CORIOLIS CORRECTION=	30.14	DRIFT CORRECTION= 740.21
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXX		
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION
29JAN65 A 2 26		
-NO CORRECTIONS-		
TARGET	VECT.	RANGE DEFLTN
COORDINATES	ERROR	ERROR
3497860.1N 569292.9E	850.3	200.4
METEOR. PARAMETER	METEOR. VALUE	UNIT EFFECT
TEMPERATURE	1.79	-12.28
DENSITY	--.03	66.90
RANGE WIND	-13.9	-20.74
CROSS WIND	3.6	-14.37
CORIOLIS CORRFCTN=	29.71	DRIFT CORRECTION= 738.88

TABLE 3-1 (continued)

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	-NO CORRECTIONS-	VECT.	RANGE	DEFLTN	X	CORRECTIONS-----	VECT.	RANGE	DEFLTN	X	Y
02FEB65	A 1 29		TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	CORRECTIONS-----		
			COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	X			
3497868.0N	569504.9E	754.9 442.0	611.9	257.9	-64.2	249.7	4.6	-257.8	4.6	CORR.	COMP.	COMP.	COMP.
METEOR. PARAMETER	METEOR.	VALUE					UNIT EFFECT				CORRECTION		
TEMPERATURE	1.85				-11.95						-22.1		
DENSITY	-•27				58.51						-18.50		
RANGE WIND	23.0				-20.22						-465.61		
CROSS WIND	-28.5				-14.55						414.58		
CORIOLIS CORRECTION=	30.43						DRIFT CORRECTION=	746.34					
XXXXXXXXXXXXXXXXXXXXXX													
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	-NO CORRECTIONS-	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	CORRECTIONS-----		
02FEB65	A 2 30		TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X			
			COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	X			
3497882.4N	569372.8E	733.4 447.5	581.1	226.2	-57.5	218.7	3.4	-226.1	3.4	CORR.	COMP.	COMP.	COMP.
METEOR. PARAMETER	METEOR.	VALUE					UNIT EFFECT				CORRECTION		
TEMPERATURE	1.85				-12.05						-22.29		
DENSITY	-•27				67.69						-18.28		
RANGE WIND	23.1				-20.11						-464.42		
CROSS WIND	-28.4				-14.49						412.08		
CORIOLIS CORRECTION=	29.97						DRIFT CORRECTION=	744.45					

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION																											
04FEB65	A 1 33	<p>-NO CORRECTIONS-</p> <table> <thead> <tr> <th>TARGET</th> <th>VECT.</th> <th>RANGE</th> <th>DEFLTN</th> <th>VECT.</th> <th>RANGE</th> <th>DEFLTN</th> <th>X</th> <th>CORRECTIONS-</th> </tr> </thead> <tbody> <tr> <td>COORDINATES</td> <td>ERROR</td> <td>ERROR</td> <td>ERROR</td> <td>ERROR</td> <td>ERROR</td> <td>ERROR</td> <td>Y</td> <td></td> </tr> <tr> <td>3497880.5N 569549.8E</td> <td>779.6</td> <td>122.4</td> <td>770.0</td> <td>204.8</td> <td>203.7</td> <td>21.0</td> <td>190.8</td> <td>74.5</td> </tr> </tbody> </table>	TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	CORRECTIONS-	COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	Y		3497880.5N 569549.8E	779.6	122.4	770.0	204.8	203.7	21.0	190.8	74.5
TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	CORRECTIONS-																					
COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	Y																						
3497880.5N 569549.8E	779.6	122.4	770.0	204.8	203.7	21.0	190.8	74.5																					
METEOR. PARAMETER	METEOR. VALUE	UNIT EFFECT																											
TEMPERATURE	2.23	-11.82																											
DENSITY	-0.02	68.97																											
RANGE WIND	-5.2	-21.04																											
CROSS WIND	.7	-14.62																											
CORIOLIS CORRECTION=	30.57	DRIFT CORRECTION= 749.46																											
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXX																													
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION																											
04FEB65	A 2 34	<p>-NO CORRECTIONS-</p> <table> <thead> <tr> <th>TARGET</th> <th>VECT.</th> <th>RANGE</th> <th>DEFLTN</th> <th>VECT.</th> <th>RANGE</th> <th>DEFLTN</th> <th>X</th> <th>CORRECTIONS-</th> </tr> </thead> <tbody> <tr> <td>COORDINATES</td> <td>ERROR</td> <td>ERROR</td> <td>ERROR</td> <td>ERROR</td> <td>ERROR</td> <td>ERROR</td> <td>Y</td> <td></td> </tr> <tr> <td>3497887.9N 569392.4E</td> <td>765.5</td> <td>184.7</td> <td>742.9</td> <td>268.5</td> <td>264.9</td> <td>243.6</td> <td>243.5</td> <td>113.2</td> </tr> </tbody> </table>	TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	CORRECTIONS-	COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	Y		3497887.9N 569392.4E	765.5	184.7	742.9	268.5	264.9	243.6	243.5	113.2
TARGET	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	CORRECTIONS-																					
COORDINATES	ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	Y																						
3497887.9N 569392.4E	765.5	184.7	742.9	268.5	264.9	243.6	243.5	113.2																					
METEOR. PARAMETER	METEOR. VALUE	UNIT EFFECT																											
TEMPERATURE	2.23	-12.00																											
DENSITY	-0.02	67.89																											
RANGE WIND	-5.2	-20.89																											
CROSS WIND	.7	-14.52																											
CORIOLIS CORRECTION=	30.03	DRIFT CORRECTION= 745.82																											

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	WITH CORRECTIONS-----				
04FEB65	P 1 35		-NO CORRECTIONS-	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN X Y
TARGET			VECT.	DEFLTN	X	Y	
COORDINATES			ERROR	ERROR	ERROR	ERROR	COMP.
34°97.892°.4N 56°59.3°.1E			790.5	225.1	757.8	225.2	222.7 33.5
METEOR. PARAMETER	METEOR. VALUL	UNIT EFFECT					CORRECTION
TEMPERATURE	2.12	-111.69					-24.78
DENSITY	-•28	69.40					-19.43
RANGE WIND	-2.0	-21.10					42.67
CROSS WIND	-3.6	-14.68					52.38
CORIOLIS CORRECTION =	30.71	DRAFT CORRECTION =	75.46				
XXXXXXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXXXXXX						
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	WITH CORRECTIONS-----				
04FEB65	P 2 36		-NO CORRECTIONS-	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN X Y
TARGET			VECT.	DEFLTN	X	Y	
COORDINATES			ERROR	ERROR	ERROR	ERROR	COMP.
49°78.85°.4N 56°38.3°.5E			785.0	284.3	731.7	282.0	273.7 67.7
METEOR. PARAMETER	METEOR. VALUL	UNIT EFFECT					CORRECTION
TEMPERATURE	2.12	-12.02					-25.48
DENSITY	-•28	67.80					-18.98
RANGE WIND	-2.0	-20.88					42.05
CROSS WIND	-3.6	-14.51					51.64
CORIOLIS CORRECTION =	30.76	DRAFT CORRECTION =	74.70				

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	-NO CORRECTIONS-	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X	CORRECTIONS-----
			TARGET	COORDINATES	ERROR	ERROR	ERROR	Y	
06FEB65	A 1 37		3497853.9N	569453.9E	1292.4	1117.5	649.2	63.6	
			METEOR. PARAMETER	METEOR.	VALUE		UNIT EFFECT		CORRECTION
			TEMPERATURE		1.39		-12.09		-16.81
			DENSITY		-1.02		68.00		-69.36
			RANGE WIND		52.7		-20.15		-1062.14
			CROSS WIND		-12.4		-14.48		179.55
			CORIOLIS CORRECTION=		30.26		DRAFT CORRECTION=		742.81
			XXXXXXXXXXXXXXXXXXXXXX				XXXXXXXXXXXXXXXXXXXXXX		
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	-NO CORRECTIONS-	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN	X	CORRECTIONS-----
			TARGET	COORDINATES	ERROR	ERROR	ERROR	Y	
06FEB65	A 2 38		3497878.9N	569360.3E	1268.4	1098.8	633.6	59.8	
			METEOR. PARAMETER	METEOR.	VALUE		UNIT EFFECT		CORRECTION
			TEMPERATURE		1.39		-12.09		-16.81
			DENSITY		-1.02		67.57		-68.92
			RANGE WIND		52.7		-20.09		-1059.56
			CROSS WIND		-12.3		-14.47		177.63
			CORIOLIS CORRECTION=		29.93		DRAFT CORRECTION=		743.58

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	-NO CORRECTIONS-	VECT.	RANGE	DEFLTN	X	Y	WITH CORRECTIONS
06FEB65	P 1 39		TARGET	VECT.	RANGE	DEFLTN	X	Y	
COORDINATES			ERROR	ERROR	ERROR	ERROR	COMP.	COMP.	
34°97'849.0N	5°69'436.0E	1523.1	1361.1	683.5	106.1	-62.2	86.0	-37.0	-99.5
METEOR. PARAMETER	METEOR.	VALUE		UNIT	EFFECT		CORRECTION		
TEMPERATURE	-•01			-9.00			•09		
DENSITY	-•76			67.82			-51.54		
RANGE WIND	68.2			-20.12			-1371.82		
CROSS WIND	-12.1			-14.45			174.33		
CORIOLIS CORRECTION=	30.21			DRAIFT CORRECTION=	741.57				
				XXXXXXXXXXXXXX	XXXXXXXXXXXXXX	XXXXXXXXXXXXXX			
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	-NO CORRECTIONS-	VECT.	RANGE	DEFLTN	X	Y	WITH CORRECTIONS
06FEB65	P 2 40		TARGET	VECT.	RANGE	DEFLTN	X	Y	
COORDINATES			ERROR	ERROR	ERROR	ERROR	COMP.	COMP.	
34°97'886.9N	5°69'388.9E	1446.4	1276.1	681.0	167.8	-148.5	78.1	-122.0	-115.1
METEOR. PARAMETER	METEOR.	VALUE		UNIT	EFFECT		CORRECTION		
TEMPERATURE	-•01			-8.85			•09		
DENSITY	-•76			67.85			-51.57		
RANGE WIND	68.2			-20.13			-1373.07		
CROSS WIND	-11.9			-14.51			172.72		
CORIOLIS CORRECTION=	30.02			DRAIFT CORRECTION=	745.57				

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION
10FEB65 P 1 43		
	- NO CORRECTIONS -	- WITH CORRECTIONS -
TARGET	VECT.	RANGE DEFLTN VECT.
COORDINATES	ERROR	ERROR ERROR
3497851.4N 569444.9E	1217.8	888.1 833.3 233.2
METEOR • PARAMETER	METEOR • VALUE	UNIT EFFECT
TEMPERATURE	-2.45	-8.97
DENSITY	.86	60.53
RANGE WIND	57.3	-20.13
CROSS WIND	-5.0	-14.47
CORIOLIS CORRECTION =	30.24	DRIFT CORRECTION = 742.19
XXXXXXXXXXXXXXXXXXXXXX; XXXXXXXXXXXXXXXX;		
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION
10FEB65 P 2 44		
	- NO CORRECTIONS -	- WITH CORRECTIONS -
TARGET	VECT.	RANGE DEFLTN VECT.
COORDINATES	ERROR	ERROR ERROR
3497871.2N 569332.9E	1184.8	861.2 813.6 242.0
METEOR • PARAMETER	METEOR • VALUE	UNIT EFFECT
TEMPERATURE	-2.45	-9.05
DENSITY	.86	59.98
RANGE WIND	57.3	-20.05
CROSS WIND	-4.9	-14.43
CORIOLIS CORRECTION =	29.84	DRIFT CORRECTION = 741.66

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	-NO CORRECTIONS-	WITH CORRECTIONS-----
TARGET	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN X Y
COORDINATES 3497848.0N 56°43'2.4E	ERROR ERROR	1056.9	266.7	-55.6 236.6 123.1
METEOR. PARAMETER	METEOR. VALUE	UNIT EFFLCT		CORRECTION
TEMPERATURE	-1.99	-9.01		17.93
DENSITY	1.51	60.43		91.25
RANGE WIND	13.3	-20.12		-267.43
CROSS WIND	23.6	-14.45		-340.96
CORIOLIS CORRECTION=	30.20	DRIFT CORRECTION=	741.32	XXXXXXXXXXXXXXXXXXXXXX
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	-NO CORRECTIONS-	WITH CORRECTIONS-----
TARGET	VECT.	RANGE DEFLTN	VECT.	RANGE DEFLTN X Y
COORDINATES 3497867.0N 6°31'7.7E	ERROR ERROR	1044.6	245.7	-66.3 218.9 129.9
METEOR. PARAMETER	METEOR. VALUE	UNIT EFFECT		CORRECTION
TEMPERATURE	-1.99	-9.10		18.11
DENSITY	1.51	59.86		90.39
RANGE WIND	13.2	-20.03		-265.12
CROSS WIND	23.6	-14.41		-340.47
CORIOLIS CORRECTION=	20.79	DRIFT CORRECTION=	740.61	XXXXXXXXXXXXXXXXXXXXXX

TABLE 3-1 (continued)

DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	WITH CORRECTIONS-----							
TARGET		-NO CORRECTIONS-	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	Y
COORDINATES		ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.	
3497844.5N	569419.9E	1158.0	345.0	1105.4	350.3	332.5	-110.2	291.1	194.8	
METEOR. PARAMETER		METEOR. VALUE		UNIT EFFECT		CORRECTION				
TEMPERATURE		-1.57		-9.06		14.22				
DENSITY		1.21		60.32		72.99				
RANGE WIND		5.0		-20.10		-99.71				
CROSS WIND		30.8		-14.43		-444.99				
CORIOLIS CORRECTION=		30.16		DRAFT CORRECTION=		741.45				
XX										
DATE	GUN CASE	HUACH 10 ZONES FIXED STATION	WITH CORRECTIONS-----							
TARGET		-NO CORRECTIONS-	VECT.	RANGE	DEFLTN	VECT.	RANGE	DEFLTN	X	Y
COORDINATES		ERROR	ERROR	ERROR	ERROR	ERROR	ERROR	COMP.	COMP.	
3497857.7N	569320.4E	1156.4	365.2	1097.2	373.1	354.0	-117.9	309.3	208.7	
METEOR. PARAMETER		METEOR. VALUE		UNIT EFFECT		CORRECTION				
TEMPERATURE		-1.57		-9.09		14.27				
DENSITY		1.21		59.88		72.45				
RANGE WIND		4.9		-20.03		-97.90				
CROSS WIND		30.8		-14.41		-444.54				
CORIOLIS CORRECTION=		29.80		DRAFT CORRECTION=		740.80				

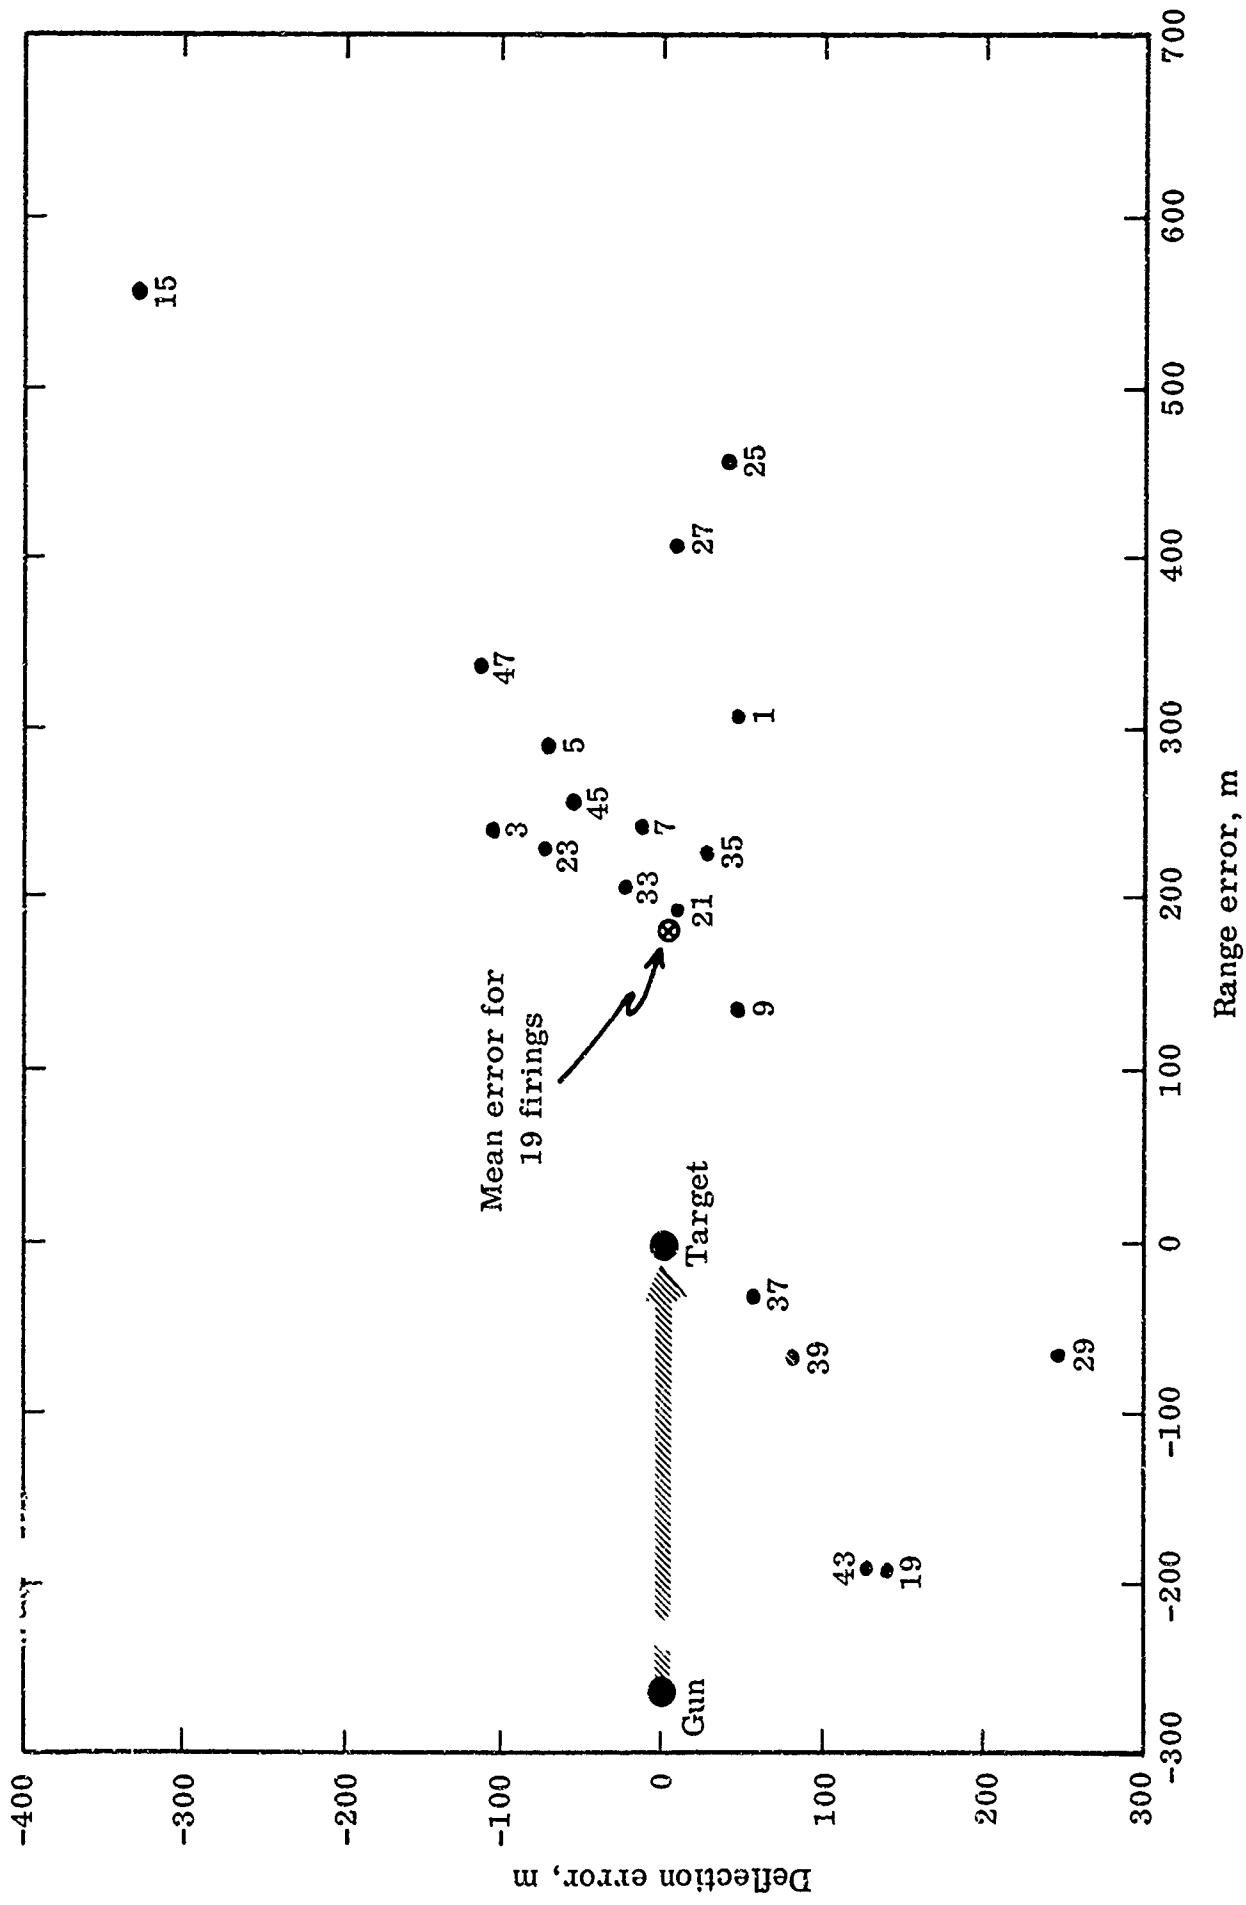


Fig. 3-1. Residual errors for Gun No. 1 firings listed in Table 3-1. Numbers refer to case numbers in table.

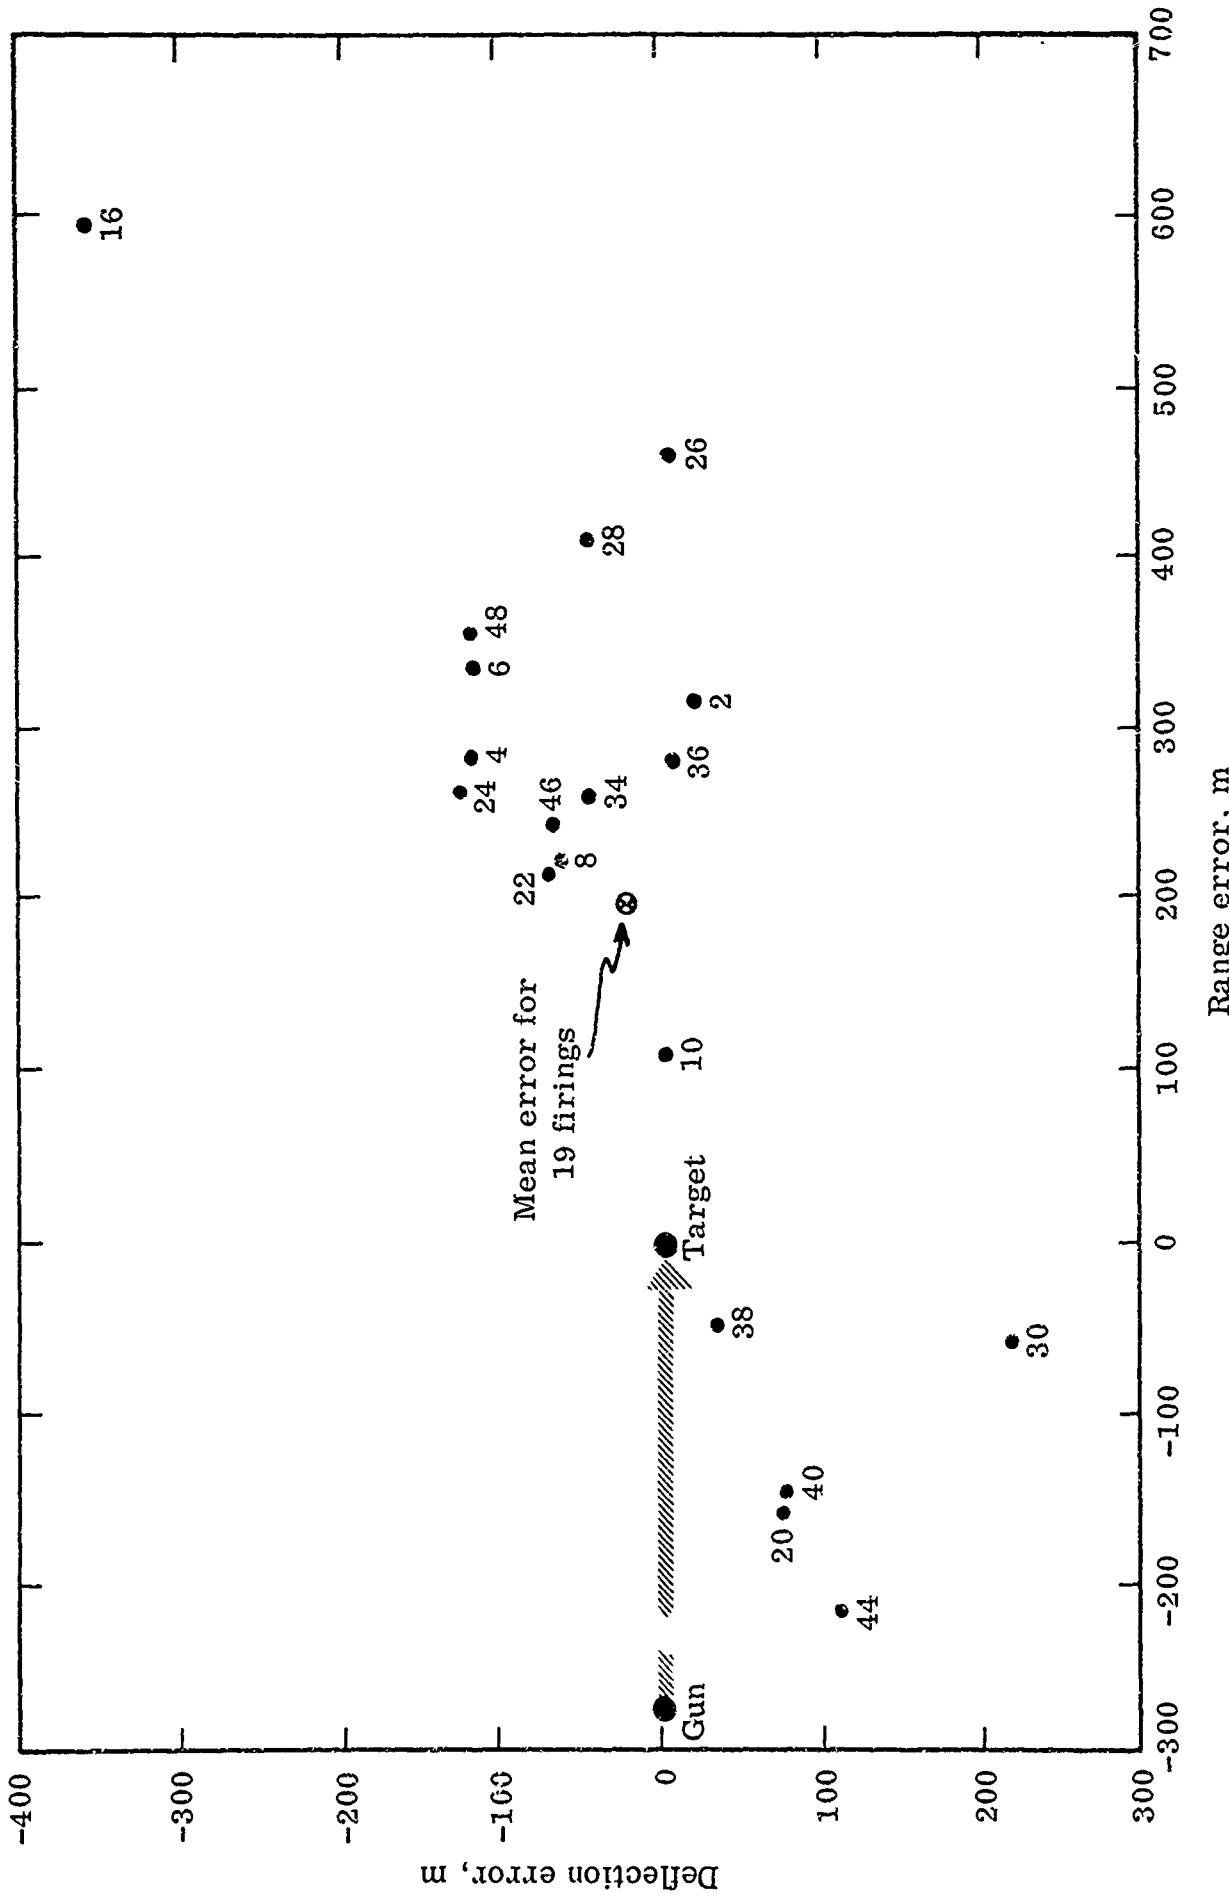


Fig. 3-2. Residual errors for Gun No. 2 firings listed in Table 3-1. Numbers refer to case numbers in Table.

TABLE 3-2
SUMMARY OF RESIDUAL ERRORS FROM TABLE 3-1 FOR
19 FIRING TIMES (in m)

Gun no.	Average error (algebraic)		Average error (absolute)		Residual vector error	Location of impacts			
	Range	Deflection	Range	Deflection		Long	Short	Left	Right
1	+187	+ 3	244	85	272	14	5	8	11
2	+198	-29	263	88	287	14	5	10	9

4.0 POST-PROCESSING PROGRAM

A computer program is being written for the IBM 7090 which will be an expanded version of the small IBM 1620 program mentioned in the previous section. It will compute fields of residual errors which can be averaged over a series of maps to determine spatial and temporal variability of artillery corrections. Corrections based on concurrent meteorological effects will be compared with corrections based on such effects 2-, 4-, 6-, and 8-hours old. The change in ballistic quantities from 0600 to 0800 MST will be used to generate a predicted 1000 MST set of ballistic maps which can be used to compute corrections. Likewise, a 1400 MST prediction can be generated from the change between 0600 and 1000 MST as well as the change between 1000 and 1200 MST.

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified.)

1. ORIGINATING ACTIVITY (Corporate author) The Travelers Research Center, Inc. 250 Constitution Plaza Hartford, Connecticut		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP N/A
3. REPORT TITLE BALLISTIC WINDS STUDY		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Quarterly Report No. 3, December 1965 to March 1966		
5. AUTHOR(S) (Last name, first name, initial) Ostby, Frederick P. Jr.		
6. REPORT DATE June 1966	7a. TOTAL NO. OF PAGES 54	7b. NO. OF REFS —
8a. CONTRACT OR GRANT NO. DA 28-043 AMC-01377(E)	9a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. IVO-25001-A-126-01	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) ECOM-01377-3	
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.		
11. SUPPLEMENTARY NOTES None	12. SPONSORING MILITARY ACTIVITY U.S. Army Electronics Command, AMSEL-BL-MA Fort Monmouth, New Jersey 07703	
13. ABSTRACT An objective analysis technique known as CRAM (Conditional Relaxation Analysis Method) has been programmed for the IBM 7090 to compute ballistic winds, temperature, and density over a region of southeastern Arizona in the vicinity of Ft. Huachuca. The various components and available options of the program are described. A set of analyses produced from initial tests is shown and the ballistic quantities derived are compared with those of the previous quarterly report.		
 Corrections based on a single station (Ft. Huachuca) were applied to concurrent artillery firings for 19 cases. The residual errors derived from these cases will be used as a control for later experiments. The distribution of the residual errors relative to the target strongly suggests a bias in range errors, the average impact location being nearly 200 meters beyond the target.		

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Ballistic winds Temperature Density						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."

(5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as, (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

END